

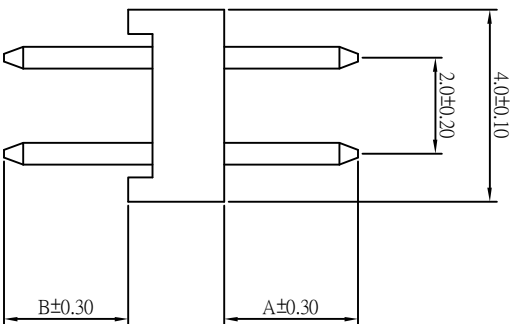
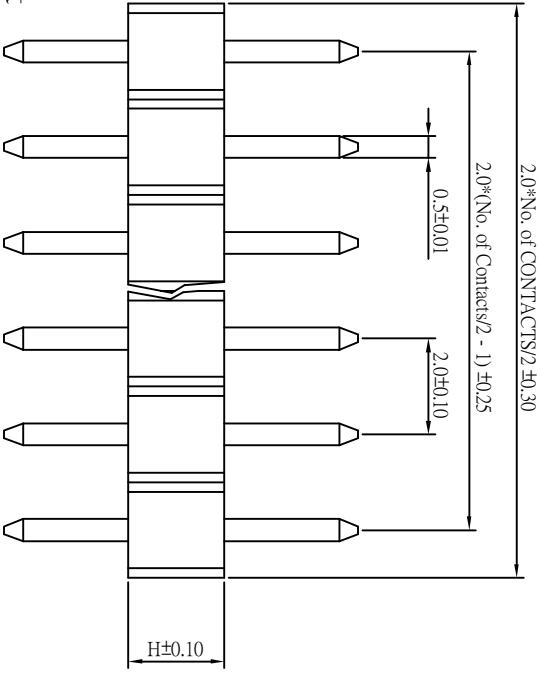


CUSTOMER COPY

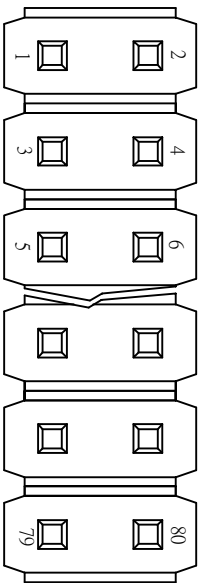

No.	A	B	H	No.	A	B	H	No.	A	B	H	No.	A	B	H
00	4.00	2.80	2.00	12	2.80	2.00	2.00	22	15.00	3.00	2.00				
04	3.80	2.90	2.00	13	4.50	2.30	2.00	23	10.00	3.00	2.00				
06	5.50	2.80	2.00	14	6.00	3.00	2.00	24	3.00	2.00	2.00				
07	2.00	2.80	2.00	15	5.00	3.00	2.00	25	3.60	2.80	2.00				
08	8.00	2.80	2.00	16	2.00	2.00	2.00	26	2.50	2.50	2.00				
09	6.00	2.60	2.00	19	6.90	2.80	2.00	27	3.00	10.7	2.00				
10	5.00	2.80	2.00	20	6.00	2.80	2.00								
11	3.50	3.50	2.00	21	17.00	3.00	2.00								

ORDER INFORMATION
113 28 XX XX X

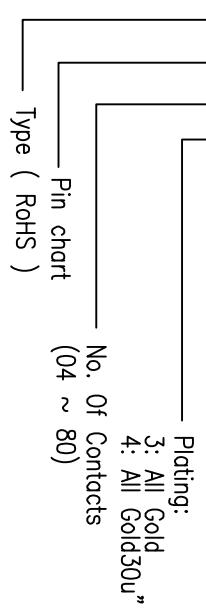


MATERIAL

- * Contact: BRASS
- * Insulator: High temperature plastic
- * Plating: All Gold

SPECIFICATION

- * Current Rating: 1 A
- * Withstanding Voltage: 600 VAC (1 min.)
- * Insulation Resistance: 1000 Megohms MIN.
- * Contact Resistance: 30 Milliohms MAX.
- * Operating Temperature: -40°C to +85°C
- * Retention Force: 600g MIN.



Recommended P.C. Board Hole Layout



鈺滿榮企業股份有限公司 ACMELUX CO., LTD.
TEL: 886-2-85124595 FAX: 886-2-85124372

0.0±0.30 SCALE: 1:1	TITLE:	PART NO:	109500
0.00±0.20 UNIT: mm	Pitch 2.00X2.00mm (.079"*.079")	APP BY:	Hung
0.000±0.1	Pin Header Dual Row Connector	CHK BY:	Cheryl
	MAT: RoHS (PBT)	DR BY:	Amos
	DWG. NO. C11328XXXXXX		

REV.	DESCRIPTION	APP.	DATE
A	NEW DESIGN	Amos	2009-06-12