


CUSTOMER COPY

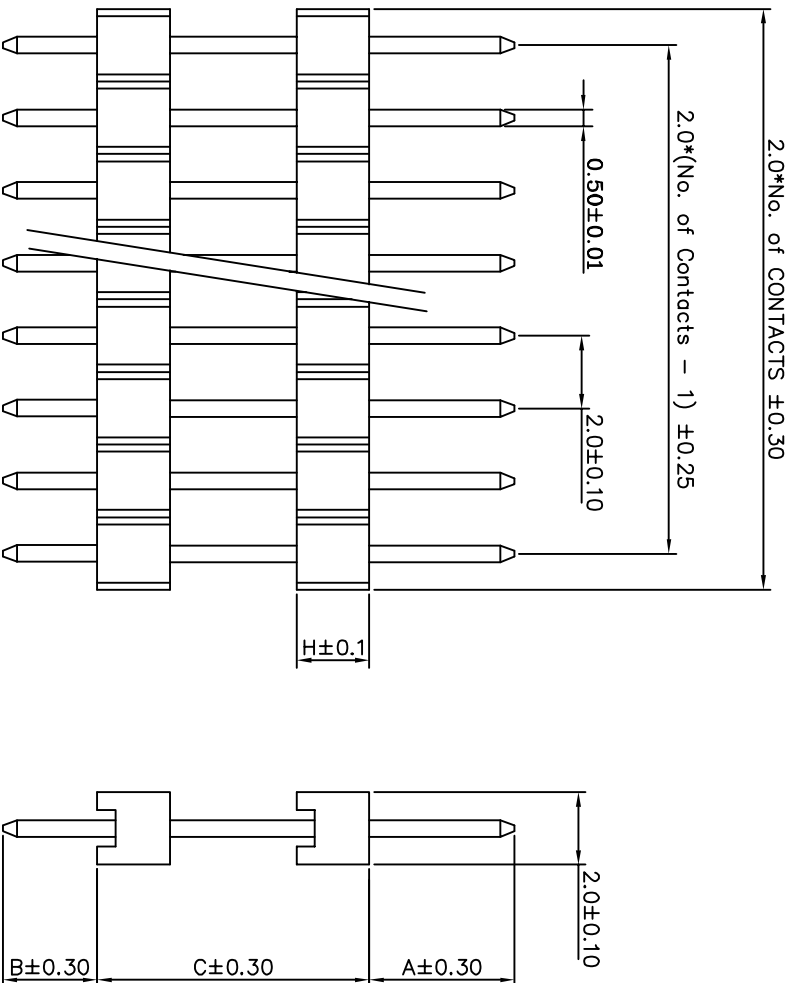


Pin Chart

No.	A	B	C	H	No.	A	B	C	H	No.	A	B	C	H	No.	A	B	C	H
00	4.00	2.50	9.30	2.00	10	2.00	1.80	6.60	2.00	20	4.00	3.00	10.5	2.00					
01	4.00	2.80	5.00	2.00	11	3.00	3.00	13.00	2.00	21	1.00	1.00	3.00	1.50					
02	4.00	3.00	15.00	2.00	12	3.50	6.00	2.40	2.00	22	4.00	2.50	3.00	1.50					
03	4.00	2.50	11.50	2.00	13	3.00	3.00	8.00	2.00	23	2.75	2.75	8.00	2.00					
04	3.00	3.00	4.00	2.00	14	2.40	2.40	5.00	2.00	24	3.00	3.00	7.50	2.00					
05	4.00	3.50	10.5	2.00	15	3.50	3.50	4.00	2.00	25	1.25	1.25	6.00	2.00					
06	4.00	2.80	6.00	2.00	16	3.00	2.00	11.80	2.00	26	1.25	1.25	4.00	2.00					
07	4.00	2.80	7.50	2.00	17	2.75	2.75	10.50	2.00	27	4.00	2.80	16.4	2.00					
08	6.00	3.00	8.50	2.00	18	4.00	2.80	3.70	1.50	28	2.00	2.00	11.00	2.00					
09	2.00	1.80	5.00	2.00	19	4.00	3.00	11.00	2.00										

ORDER INFORMATION

113 48 XX XX X

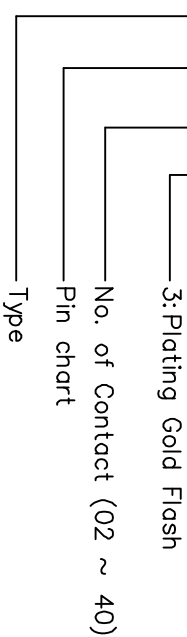


MATERIAL

- * Contact: BRASS
- * Insulator: High temperature plastic
- * Plating: All Gold

SPECIFICATION

- * Current Rating: 1 A
- * Withstanding Voltage: 600 VAC (1 min.)
- * Insulation Resistance: 1000 Megohms MIN.
- * Contact Resistance: 30 Milliohms MAX.
- * Operating Temperature: -40°C to +85°C
- * Retention Force: 600g MIN.



Recommended P.C. Board Hole Layout



钰满乐企业股份有限公司 ACMELEX CO., LTD.
TEL: 886-2-85124595 FAX: 886-2-85124322

0.0±0.30	SCALE: 1:1	TITLE:	PART NO:
0.00±0.20	UNIT: mm	Pitch 2.00mm Double Base	109400
0.000±0.1		single Row Type Pin Header	APP BY: <i>Shung</i>

MATL: RoHS (PBT)	CHK BY: <i>Sheryl</i>
DWG. NO. C11348XXXXXX	DR BY: <i>Amos</i>

REV.	DESCRIPTION	APP.	DATE
A	NEW DESIGN	Amos	2010-04-29