



CUSTOMER COPY

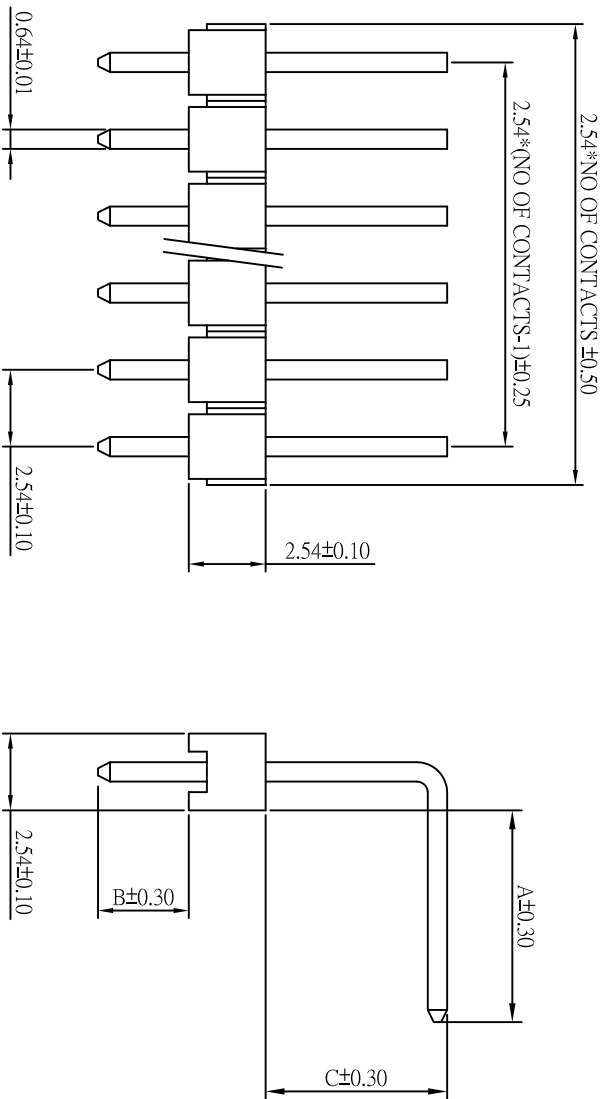

ORDER INFORMATION

114 00 XX XX X

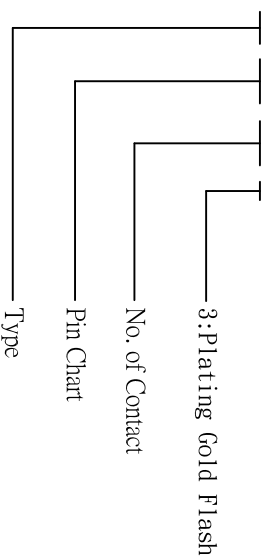


SPECIFICATION

- * Current Rating: 3 A
- * Withstanding Voltage: 800 VAC (1 min.)
- * Insulation Resistance: 1000 Megohms min.
- * Contact Resistance: 30 Milliohms max.
- * Operating Temperature: -40°C to +85°C
- * RETENTION FORCE: 750g MIN.

MATERIAL


- * Contact: Brass , 0.64mm square post
- * Insulator: PBT & 30% G.F.
- * Plating: Gold



Recommended P.C. Board Hole Layout



Pin Chart				Pin Chart				Pin Chart				Pin Chart			
No.	A	B	C	No.	A	B	C	No.	A	B	C	No.	A	B	C
00	6.00	3.00	4.40	10	6.00	0.60	5.40	20	6.00	3.00	1.50	30	2.50	2.50	1.50
01	6.00	3.00	3.00	11	7.85	3.00	3.82	21	3.00	3.00	4.00	31	3.00	8.00	4.00
02	3.40	3.40	3.13	12	6.00	3.00	3.55	22	6.00	3.00	2.00				
03	7.50	3.00	2.50	13	26.00	3.00	1.86	23	6.00	3.60	3.00				
04	3.60	3.00	1.86	14	2.50	2.50	0.64	24	7.80	3.00	3.70				
05	15.00	3.00	2.85	15	4.00	3.00	0.64	25	6.00	3.00	0.64				
06	6.00	3.00	2.80	16	5.60	3.00	1.74	26	10.73	2.00	2.00				
07	3.60	3.00	4.40	17	8.00	3.00	2.85	27	3.00	3.00	3.00				
08	1.50	1.50	0.64	18	5.00	3.00	0.64	28	6.00	3.00	5.40				
09	8.00	3.00	4.00	19	3.50	3.20	2.30	29	7.50	3.00	1.50				


钰满荣企业股份有限公司 ACMELUX CO., LTD.
 TEL.:886-2-85124595 FAX:886-2-85124322

0.0±0.30	SCALE: 1:1	TITLE: 2.54MM (.100") Center Pin	PART NO:
0.00±0.20	UNIT: mm	HEADER R/A Single Row	APP BY: Hung
0.000±0.10		MATL: RoHS (PBT)	CHK BY: Cheryl
		DWG. NO. C11400XXXXX	DR BY: Amos

REV.	DESCRIPTION	APP.	DATE
A	NEW DESIGN	Amos	2013-01-09