
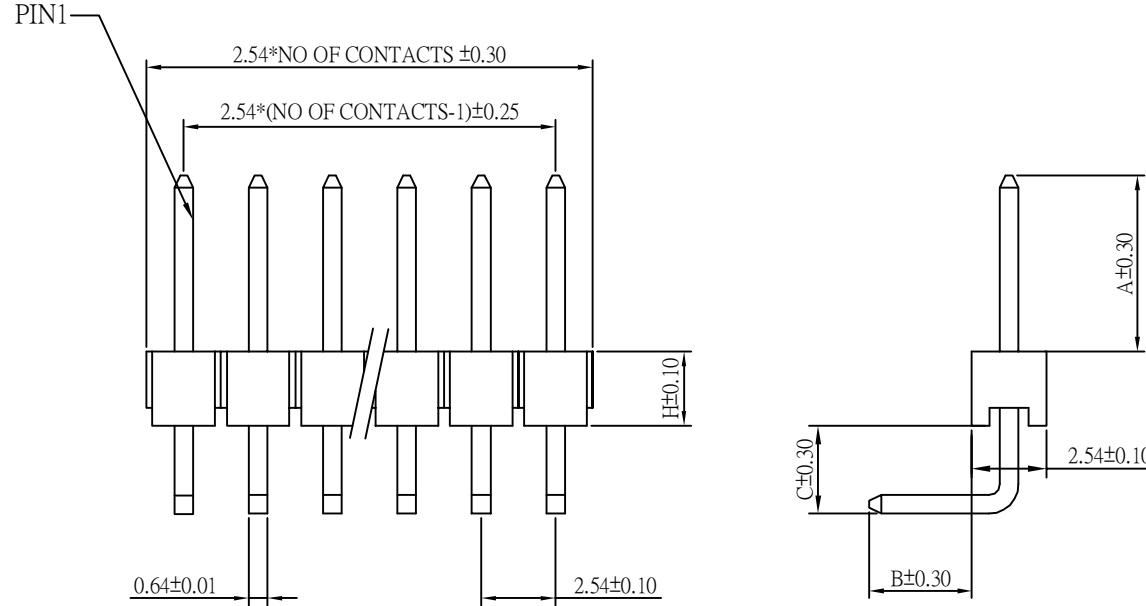


CUSTOMER COPY

REV.	DESCRIPTION	APP.	DATE
A	NEW DESIGN		

ORDER INFORMATION

114 06 XX XX X

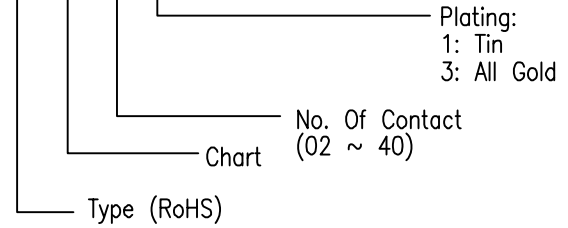

SPECIFICATION

- * Current Rating: 3 A
- * Withstanding Voltage: 800 VAC (1 min.)
- * Insulation Resistance: 1000 Megohms min.
- * Contact Resistance: 30 Milliohms max.
- * Operating Temperature: -40°C to +85°C
- * RETENTION FORCE: 750g MIN.


MATERIAL

- * Contact: Brass , 0.64mm square post
- * Insulator: High temperature plastic
- * Plating: Gold

Pin Chart

NO.	A	B	C	H	NC PIN
00	6.00	4.00	1.86	2.54	P3.4.7.10.11.13.14
01	6.00	4.00	1.86	2.54	P3.4.5.9
02	6.00	4.00	1.86	2.54	P2.5
03	6.00	3.50	1.86	2.54	P5.7
04	6.00	3.00	1.86	2.54	P3
05	6.00	3.50	1.86	2.54	P2
06	6.00	4.00	1.86	2.54	P11
07	6.00	3.50	1.86	2.54	P4
08	6.00	3.00	1.86	2.54	P5
09	6.00	3.50	1.86	2.54	P2.5

NO.	A	B	C	H	NC PIN
98	6.90	3.00	1.80	1.70	P2.4
99	6.90	3.00	1.80	1.70	P2.4.6

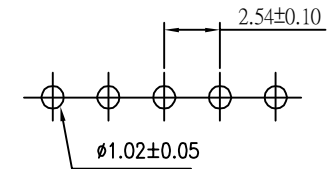

Recommended P.C. Board Hole Layout

鈺滿榮企業股份有限公司 ACMELUX CO., LTD.
 TEL:886-2-85124595 FAX:886-2-85124322

0.0±0.30	SCALE: 1:1	TITLE: Pitch 2.54mm(.100") R/A Single Row NC Pin Type Pin Header Connector	PART NO:
0.00±0.20	UNIT: mm		APP BY: Hung
0.000±0.1			CHK BY: Cheryl
		MATL: RoHS (PBT)	DR BY: Amos
		DWG. NO. C11406XXXXX	