




CUSTOMER COPY

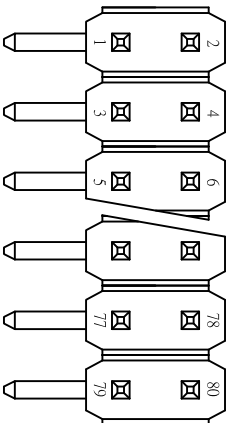

Recommended P.C. Board Hole Layout

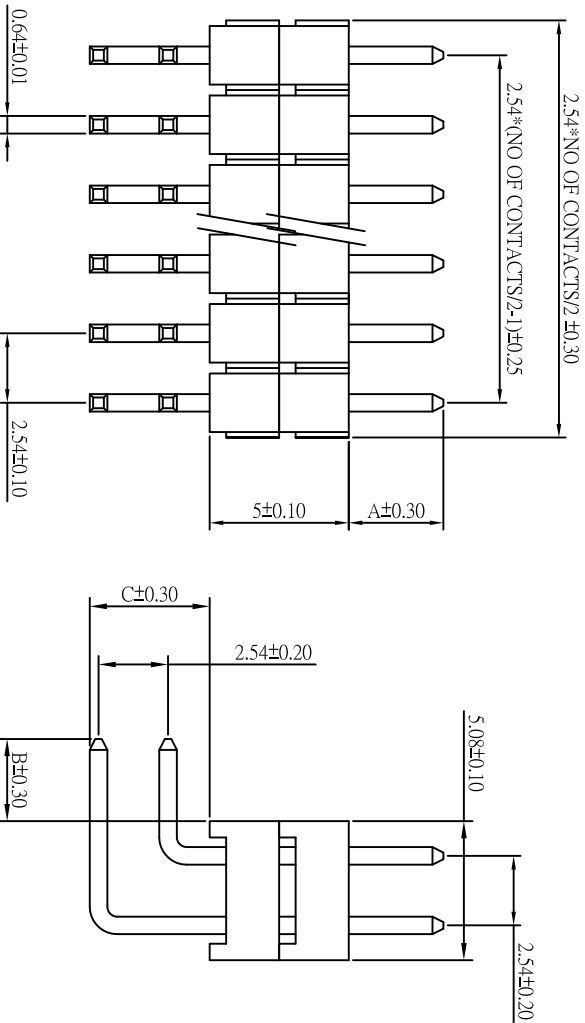

Pin Chart

No.	A	B	C
00	6.00	3.00	4.40
01			
02			
03			
04			

Pin Chart


No.	A	B	C
05			
06			
07			
08			
09			

Pin Chart

No.	A	B	C
10			
11			
12			
13			
14			

ORDER INFORMATION

114 64 XX XX X

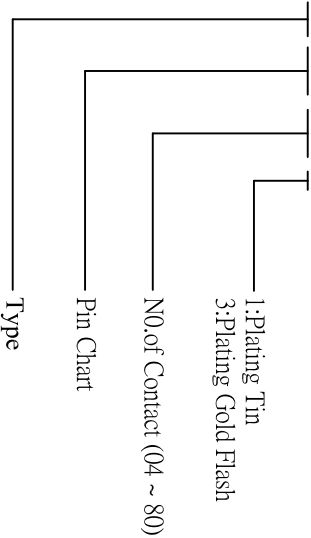

SPECIFICATION

- * Current Rating: 3 A
- * Withstanding Voltage: 800 VAC (1 min.)
- * Insulation Resistance: 1000 Megohms min.
- * Contact Resistance: 30 Milliohms max.
- * Operating Temperature: -40°C to +85°C
- * RETENTION FORCE 750g MIN.

MATERIAL

- * Contact: Brass , 0.64mm square post
- * Insulator: PBT
- * Plating: Gold




钰满荣企业股份有限公司 ACME LUX CO., LTD.

TEL:886-2-85124595

FAX:886-2-85124322

0.0±0.30	SCALE: 1:1	TITLE: P114 64 XX XX X	PART NO:
0.00±0.20	UNIT: mm	.100") 90° Dual Row Type	APP BY: Hung
0.000±0.1		Pin Header Connector	CHK BY: Cheryl



MATL: RoHS (PBT)

DWG. NO. C11464XXXXXX

DR BY: Amos

REV.	DESCRIPTION	APP.	DATE
A	NEW DESIGN	Amos	2012-06-14