


CUSTOMER COPY

| REV. | DESCRIPTION | APP. | DATE |
|------|-------------|------|------------|
| A | NEW DESIGN | Amos | 2010-06-22 |





ORDER INFORMATION

1200 10 X XX X

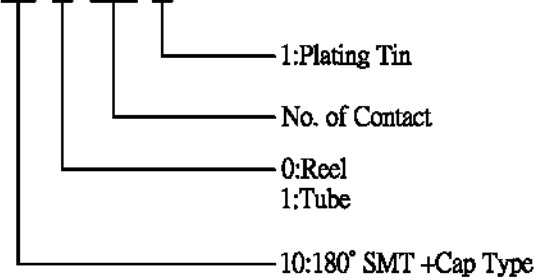


A
B
C
D

A
B
C
D

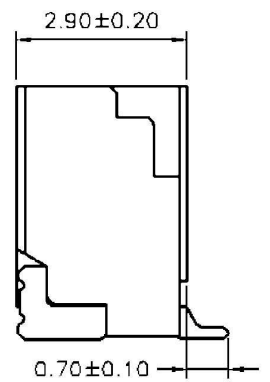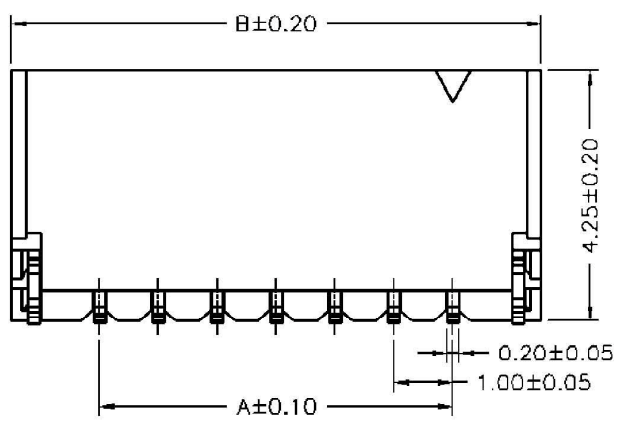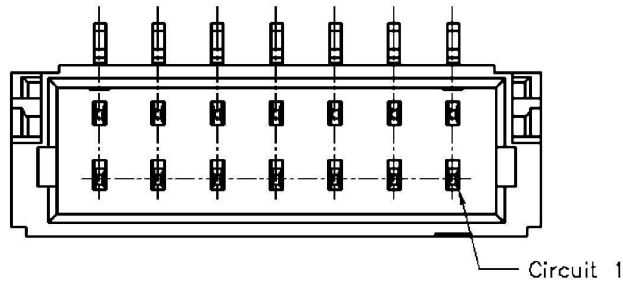

NOTES:
 1. MATERIAL:
 HOUSING:PA6T,UL94V-0,COLOR:ORIGIN
 CAP:PA6T,UL94V-0
 SOLDER TABS:PHOSPHOR BRONZE,TIN PLATED
 CONTACT:PHOSPHOR BRONZE,TIN PLATED
 2.SPECIFICATIONS:
ELECTRICAL:
 CURRENT RATING:1.0AMPS AC/DC
 VOLTAGE RATING:50V AC/DC
 DIELECTRIC WITHSTANDING VOLTAGE:500V AC
 INSULATION RESISTANCE:100MΩ MIN
 CONTACT RESISTANT:20mΩ MAX
PHYSICAL:
 SOLDER ABILITY:245±5°C,95% COVERAGE
 REFLOW SOLDER CAPABLE TO 260±5°C,10SEC
ENVIRONMENTAL:
 OPERATING TEMPERATURE:-25°C~+85°C

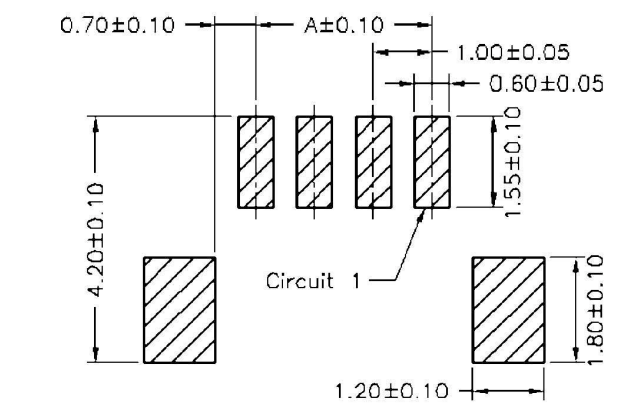

RECOMMENDED PCB LAYOUT

| DIMENSIONS | | |
|------------|-------|-------|
| POS. | A | B |
| 2P | 1.00 | 4.00 |
| 3P | 2.00 | 5.00 |
| 4P | 3.00 | 6.00 |
| 5P | 4.00 | 7.00 |
| 6P | 5.00 | 8.00 |
| 7P | 6.00 | 9.00 |
| 8P | 7.00 | 10.00 |
| 9P | 8.00 | 11.00 |
| 10P | 9.00 | 12.00 |
| 11P | 10.00 | 13.00 |
| 12P | 11.00 | 14.00 |
| 13P | 12.00 | 15.00 |
| 14P | 13.00 | 16.00 |
| 15P | 14.00 | 17.00 |
| 16P | 15.00 | 18.00 |
| 17P | 16.00 | 19.00 |
| 18P | 17.00 | 20.00 |
| 19P | 18.00 | 21.00 |
| 20P | 19.00 | 22.00 |



鈺滿榮企業股份有限公司 ACMELUX CO., LTD.
 TEL: 886-2-85124595 FAX: 886-2-85124322

| | | | |
|----------------|------------|--|------------------|
| 0.0±0.30 | Scale: 1:1 | Title: Pitch 1.0mm Straight SMT Type Wafer Connector | PART NO: |
| 0.00±0.20 | Unit: mm | | APP BY: Hung |
| 0.000±0.1 | | | CHK BY: Cheryl |
| Material: RoHS | | DWG. NO. C120010XXXX | DR BY: Amos A303 |

1 2 3 4 5 6