CUSTOMER COPY

REV	ECN NO.	APP.	DATE
A	NEW DESIGN		

MALE

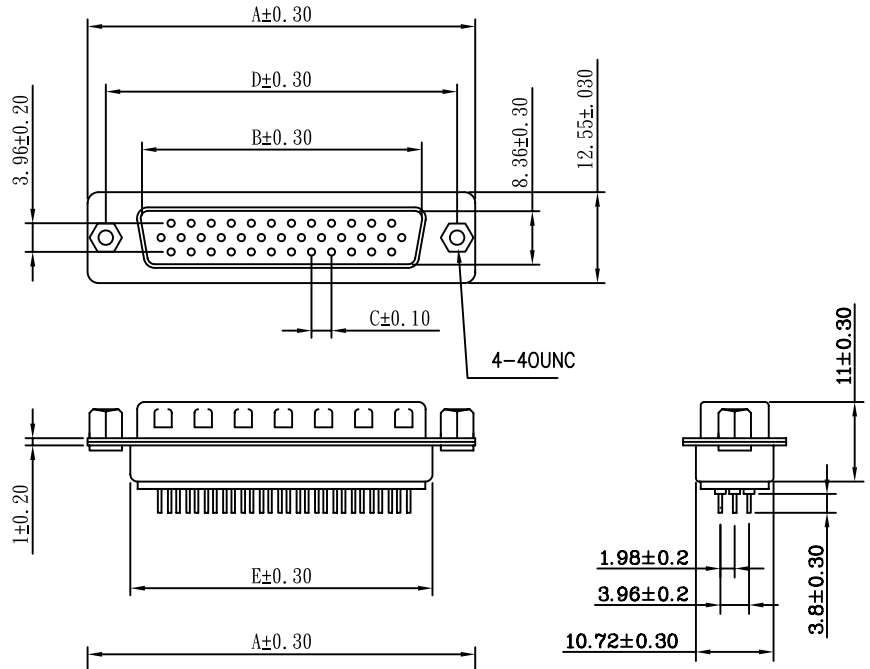

FEMALE

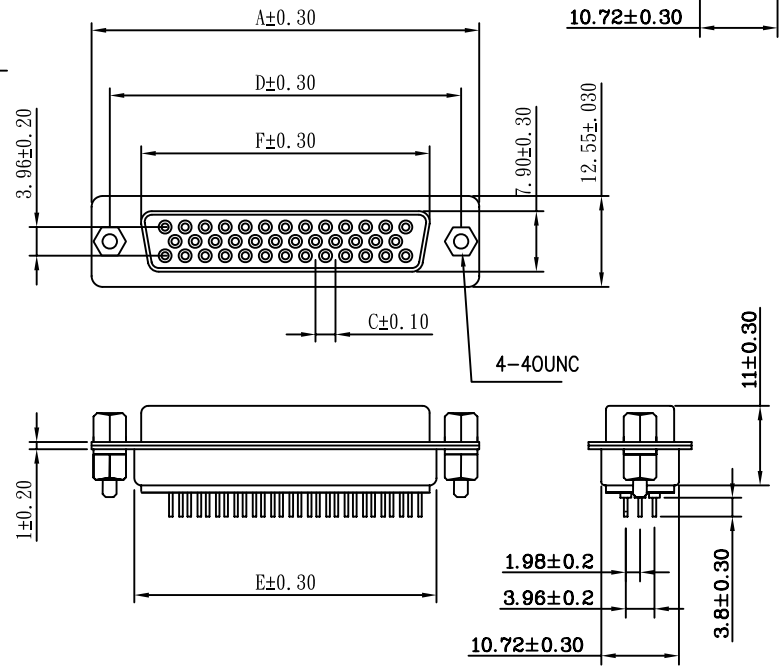

SPECIFICATION

* Current Rating: 5 A
* Withstanding Voltage: 1000 VAC (1 min.)
* Insulation Resistance: 1000 Megohms MIN.
* Contact Resistance: 30 Milliohms MAX.
* Operating Temperature: −40°C to +85°C

MATERIAL

* Contact: Brass , Selective Gold or All Gold
* Insulator: PBT & 30% G. F.
* Shell: Stell , Tin Plated

ORDER INFORMATION

1455 X X X XX X

- Plating: 2: Selective Gold; 3: All Gold
- No. of Contact: 15, 26, 44, 62, 78
- Color: 0: Black; 1: Blue; 2: White
- Style: 0: W/O SCREW; 1: With SCREW 上卯; 2: With SCREW 下卯; 3: With SCREW 下卯鎖螺絲
- Contact Type: 4: Female (RoHS); 5: Male (RoHS)



PART NO.	A	B	C	D	E	F
1455XXX15X	30.80	16.90	2.29	24.99	19.30	16.30
1455XXX26X	39.10	25.30	2.29	33.32	27.50	24.70
1455XXX44X	53.00	39.00	2.29	47.04	41.30	38.40
1455XXX62X	69.30	55.40	2.41	63.50	57.70	54.80
1455XXX78X	66.90	52.86	2.41	61.11	55.30	52.34

ACMELUX CO., LTD.
TEL:886-2-85124595 FAX:886-2-85124322

0.0± / 0.00± / 0.000±	SCALE: / UNIT: mm	TITLE: D-SUB CONNECTOR H.D. DIP Type	PART NO:
			APP BY: Hung
		MATL: RoHS (PBT)	CHK BY: Cheryl
		DWG. NO. C1455XXXXXX	DR BY: Amos