

CUSTOMER COPY

ORDER INFORMATION

1456 5 X X XX X

REV	ECN NO.	APP.	DATE
A	NEW DESIGN		

No. of Contact  
9, 15, 25, 37

Plating:  
2: Selective Gold  
3: All Gold

Color:  
0: Black  
1: Blue  
2: White  
3: Green  
4: Purple

Style:

- 0: WITH JACK SCREW & BOARD LOCKS (插接)
- 1: WITH 4-40 INSERT & BOARD LOCKS (插扣)
- 2: JACK SCREW + WITH 4-40 INSERT & BOARD LOCKS (插扣附螺絲螺帽4,8)
- 3: WITH JACK SCREW & GROUND STRAPS (鍍接地片)
- 4: WITH 4-40 INSERT & GROUND STRAPS (印接地片)
- 5: BOARD LOCKS WITH RIVET W/O SCREW (印合不附螺絲)
- 6: ATTACHED SCREW WITH 4-40 INSERT & BOARD LOCKS (插扣附螺絲螺帽6)
- 7: ATTACHED SCREW WITH 4-40 INSERT & BOARD LOCKS (插扣鎖螺絲)

MATERIAL:

SHELL: Steel  
INSULATOR: PBT with 25% Glass Fiber, UL 94V-0,

CONTACT: Phos. Bronze or Brass.  
BOARDLOCKS: Brass.

THREADED INSERTS: Brass.

FINISH:







SHELL: Nickel plated.  
CONTACT: Gold plated on contact area & 100u" Min. Tin/lead plated on soldering end over 30u" or 50u" Nickel under-plating.

BOARDLOCKS: Tin/lead plated on soldering end over Nickel under-plating.

THREADED INSERTS: Nickel plated.

SPECIFICATION:

Current Rating: 2A Max.  
Dielectric Strength: 1000V AC RMS for 1 minute.  
Contact Resistance: 20 mΩ Max.  
Insulator Resistance: 1000MΩ Min.  
Temperature: -55°C to +105°C

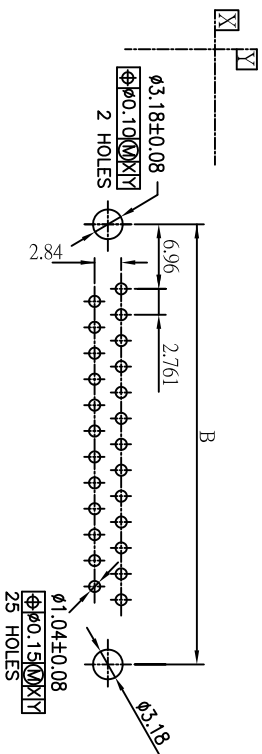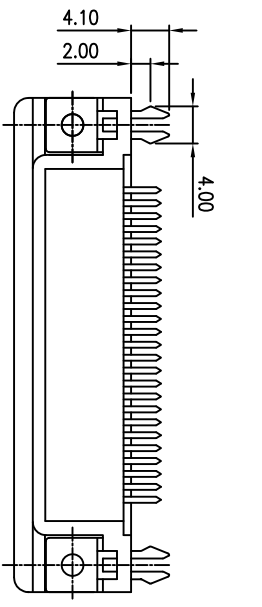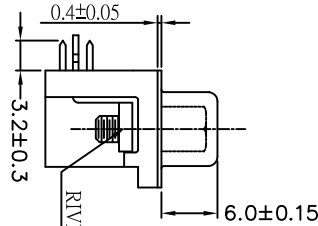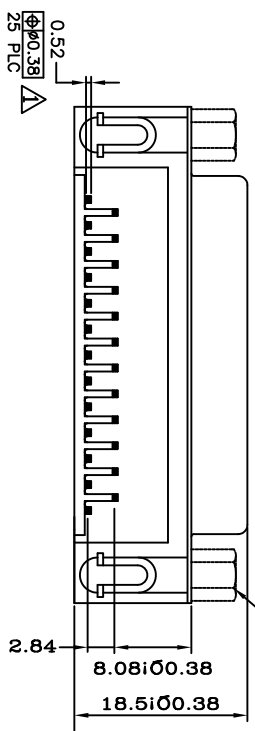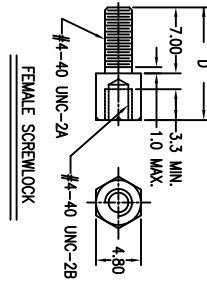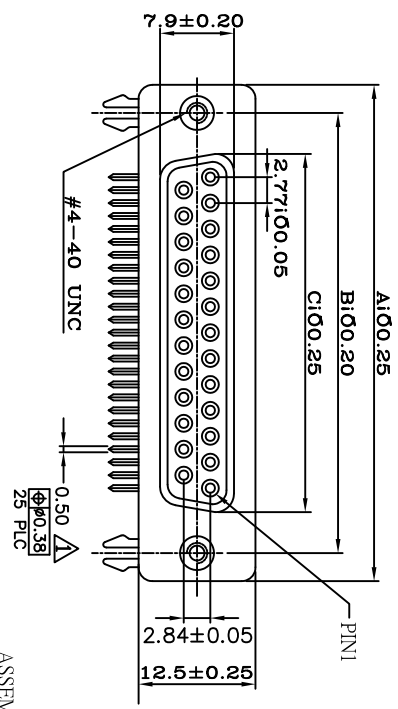

P.C.B LAYOUT

POS NO	A	B	C	D
14565XX09X	30.80	24.99	16.33	11.80
14565XX15X	39.20	33.32	24.66	11.80
14565XX25X	53.10	47.04	38.40	11.80
14565XX37X	69.32	63.50	54.84	11.80
				1.300



ACMELUX CO., LTD.

TEL:886-2-85124595 FAX:886-2-85124322

0.0±	SCALE:	PART NO:
0.00±	UNIT:	APP BY: Hung
0.000±	MM	CHK BY: Cheryl
TITLE: D-SUB CONNECTOR Right Angle Type (FEMALE)		DR BY: Amos
MATERIAL: RoHS		
DWG. NO. C14565XXXX		