CUSTOMER COPY

REV.	DESCRIPTION	APP.	DATE
A	NEW DESIGN		

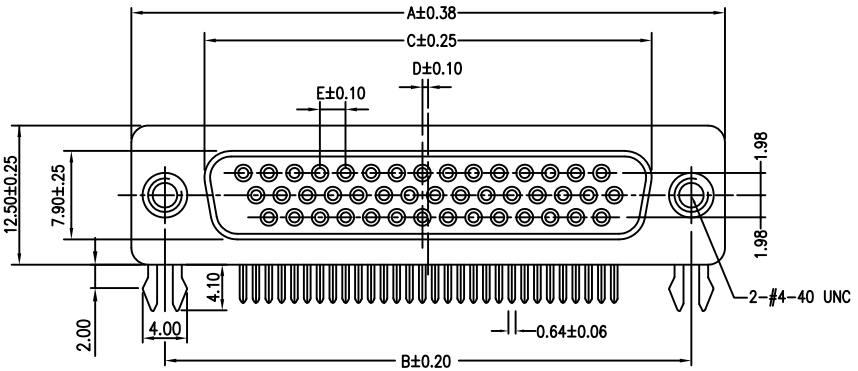



FEMALE SCREWLOCK

ORDER INFORMATION

1459 5 X X XX X

- 2:Plating Selective Gold
  3:Plating Gold Flash
- No. of Contact (15, 26, 44, 62)
- 0: Color Black
  1: Color Blue
  2: Color White
  3: Color Light Blue
  4: Color Dark Blue
- Style:
  0: WITH JACK SCREW & BOARD LOCKS (插鎖)
  1: WITH 4-40 INSERT & BOARD LOCKS (插卯)
  2: JACK SCREW + WITH 4-40 INSERT & BOARD LOCKS (插卯附螺絲)
  3: WITH JACK SCREW & GROUND STRAPS (鎖接地片)
  4: WITH 4-40 INSERT & GROUND STRAPS (卯接地片)
  7: WITH JACK SCREW & WITH 4-40 INSERT & BOARD LOCKS (插卯鎖螺絲)
- 5: Female (ROHS) Contact Type

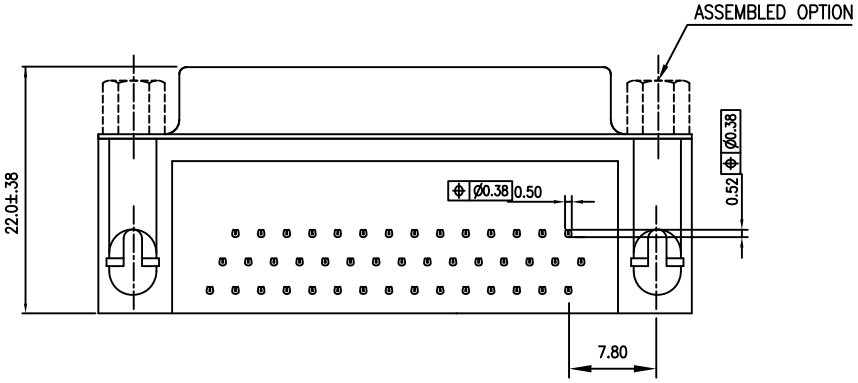



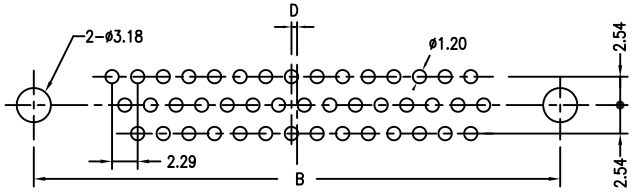

P.C.B LAYOUT

POS NO	A	B	C	D	E	F	
14595XX15X	30.81	24.99	16.33	0.25	2.29	11.8	13.0
14595XX26X	39.14	33.32	24.66	0.51	2.29	11.8	13.0
14595XX44X	53.04	47.04	38.40	0.51	2.29	11.8	13.0
14595XX62X	69.32	63.52	54.80	0.58	2.41	11.8	13.0

MATERIAL:

SHELL: Steel.
INSULATOR: PBT & 30% G.F UL 94V-0,
CONTACT: Phosphor Bronze.
BOARDLOCKS: Brass.
THREADED INSERTS: Brass.

FINISH:

SHELL: Nickel plated.
CONTACT: Gold plated on contact area & 100 m"
Min. Tin/lead plated on soldering end
over 30 or 50 m" Nickel under-plating.
BOARDLOCKS: Tin/lead plated on soldering end
over Nickel under-plating.
THREADED INSERTS: Nickel plated.

SPECIFICATION:

Current Rating: 2A Max.
Dielectric Strength: 1000V AC RMS for 1 minute.
Contact Resistance: 20 mΩ Max.
Insulator Resistance: 1000MΩ Min.
Temperature: -55°C to +105°C

鈺滿榮企業股份有限公司 ACMELUX C0., LTD.
TEL:886-2-85124595 FAX:886-2-85124322

0.0±0.30 0.00±0.20 0.000±0.1	SCALE: 1:1 UNIT: mm	TITLE: D-SUB CONNECTOR H.D. Right Angle Type (FEMALE)	PART NO:
			APP BY: Hung
	MATL: RoHS		CHK BY: Cheryl
	DWG. NO. C14595XXXXX		DR BY: Amos A