


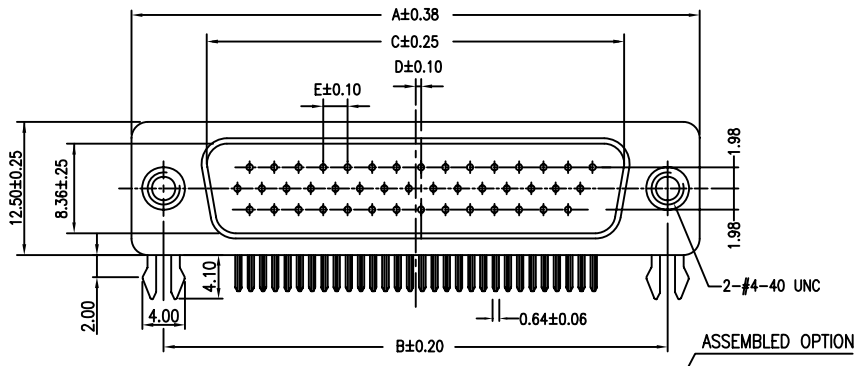
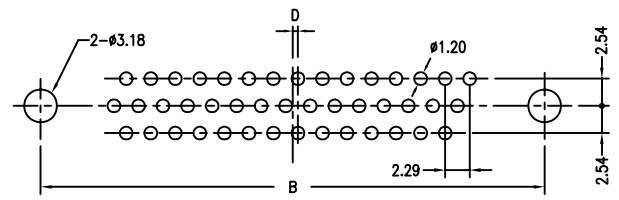


CUSTOMER COPY

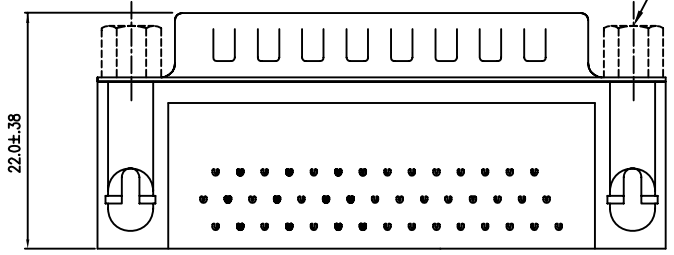

FEMALE SCREWLOCK



P.C.B LAYOUT

POS NO	A	B	C	D	E	F
14596XX15X	30.81	24.99	16.92	0.25	2.29	11.8 13.0
14596XX26X	39.14	33.32	25.25	0.51	2.29	11.8 13.0
14596XX44X	53.04	47.04	38.96	0.51	2.29	11.8 13.0
14596XX62X	69.32	63.50	55.42	0.58	2.41	11.8 13.0

ORDER INFORMATION

1459 6 X X XX X

- Plating:
3: All Gold
- No. of Contact
15, 26, 44, 62
- Color:
0: Black
1: Blue
2: White
- Style:
0: WITH JACK SCREW & BOARD LOCKS (插鎖)
1: WITH 4-40 INSERT & BOARD LOCKS (插卯)
2: JACK SCREW + WITH 4-40 INSERT & BOARD LOCKS (插卯附螺絲)
3: WITH JACK SCREW & GROUND STRAPS (鎖接地片)
4: WITH 4-40 INSERT & GROUND STRAPS (卯接地片)
- Contact Type
1: Male (RoHS)

REV	ECN NO.	APP.	DATE
A	NEW DESIGN		

MATERIAL:

- SHELL: Steel.
- INSULATOR: PBT with 25% Glass Fiber,
UL 94V-0,
- CONTACT: Brass
- BOARDLOCKS: Brass.
- THREADED INSERTS: Brass.

FINISH:

- SHELL: Nickel plated.
- CONTACT: Gold plated on contact area & 60μ" Min. Tin/lead plated on soldering end over 30 or 50μ" Nickel under-plating.
- BOARDLOCKS: Tin/lead plated on soldering end over Nickel under-plating.
- THREADED INSERTS: Nickel plated.

SPECIFICATION:

- Current Rating: 2A Max.
- Dielectric Strength: 1000V AC RMS for 1 minute.
- Contact Resistance: 20 mΩ Max.
- Insulator Resistance: 1000MΩ Min.
- Temperature: -55°C to +105°C



ACMELUX CO., LTD.

TEL:886-2-85124595 FAX:886-2-85124322

0.0± 0.30	SCALE: UNIT: mm	TITLE: D-SUB CONNECTOR H.D. Right Angle Type (MALE)	PART NO:
0.00± 0.20			APP BY: Hung
0.000±0.10			CHK BY: Cheryl
			DR BY: Amos