



CUSTOMER COPY

REV.	DESCRIPTION	APP.	DATE
A	NEW DESIGN	Amos	2012-10-15



ORDER INFORMATION

170 36 03 XX X

- 3:Plating Gold Flash
- No. of Contact
- H:1.0 1.9 / 1.4 / 4.5
- SMT Type

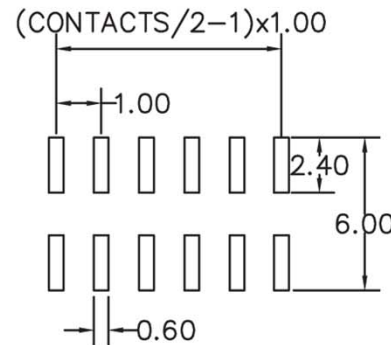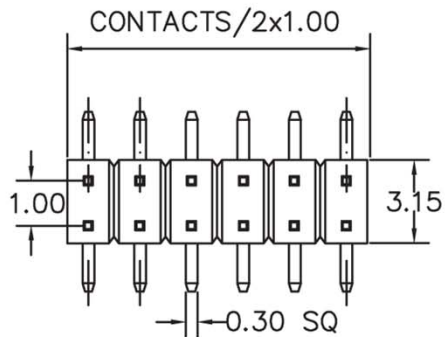

RECOMMENDED P.C.B LAYOUT

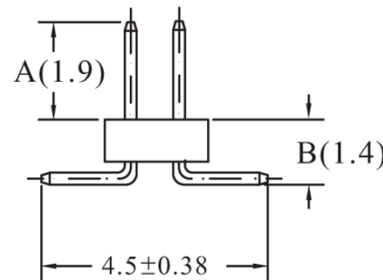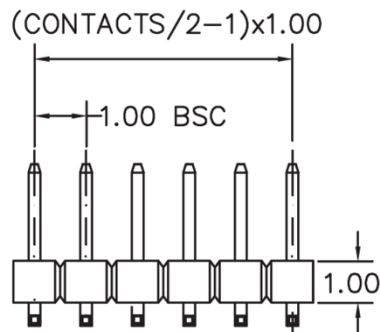

SPECIFICATIONS

- Current rating : 1 Amp
- Contact Resistance : 20 Milliohms Max .
- Insulation resistance : 5000 Megohms Min.
- Operating Temperature : - 40°C ~ + 105°C
- Withstanding Voltage: AC 500V RMS

Contact Matenal : Copper Alloy
 Insulator Materal : Thermoplastic UL 94V-0



鈺滿榮企業股份有限公司 ACMELUX CO., LTD.

TEL:886-2-85124595

FAX:886-2-85124322

0.0±0.38	SCALE: 1:1	TITLE:	PART NO:
0.00±0.25	UNIT: mm	Pitch 1.0mm Dual Rows SMT Type Pin Header Connector	APP BY: <i>Hung</i>
0.000±0.13			CHK BY: <i>Cheryl</i>
		MATL: RoHS	DR BY: <i>Amos</i>
		DWG. NO. C1703603XXX	A225