


**CUSTOMER COPY**

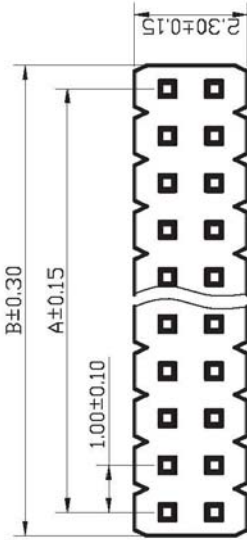

**ORDER INFORMATION**



170 36 04 XX X

3:Plating Gold Flash

No. of Contact


H=1.0mm / 1.5mm / 4.8mm

Dual Rows SMT Type

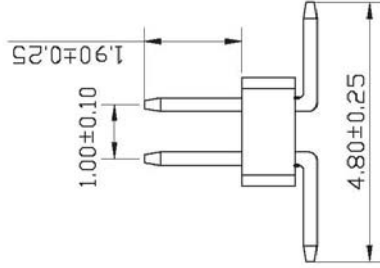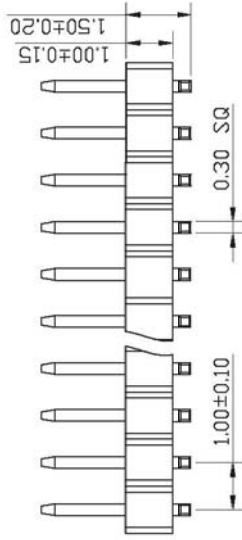

**SPECIFICATIONS**

Current Rating: 0.75 Amps  
 Withstanding Voltage: AC 500V  
 Insulation Resistance: 1000MΩ Min  
 Contact Resistance: 30MΩ Max  
 Operation Temperature: -40\*to+105\*  
 Insulator Material: Polyester(UL94V-0)  
 Standard: 6T  
 Contact Material: Brass  
 Contact Plating: Au or SN over 50n" Ni  
 Max.Processing Temp: 230°C for 30-60 seconds  
 (260°C for 5 seconds)



**RECOMMEND P. C. BOARD LAYOUT**  
**PCB TOLERANCE:±0.05 (TOP VIEW)**



CONTACTS	DIMENSIONS	
	A	B
2	1.00	2.00
3	2.00	3.00
4	3.00	4.00
5	4.00	5.00
6	5.00	6.00
7	6.00	7.00
8	7.00	8.00
9	8.00	9.00
10	9.00	10.00
11	10.00	11.00
12	11.00	12.00
13	12.00	13.00
14	13.00	14.00
15	14.00	15.00
16	15.00	16.00
17	16.00	17.00
18	17.00	18.00
19	18.00	19.00
20	19.00	20.00
21	20.00	21.00
22	21.00	22.00
23	22.00	23.00
24	23.00	24.00
25	24.00	25.00
26	25.00	26.00
27	26.00	27.00
28	27.00	28.00
29	28.00	29.00
30	29.00	30.00
31	30.00	31.00
32	31.00	32.00
33	32.00	33.00
34	33.00	34.00
35	34.00	35.00
36	35.00	36.00
37	36.00	37.00
38	37.00	38.00
39	38.00	39.00
40	39.00	40.00
41	40.00	41.00
42	41.00	42.00
43	42.00	43.00
44	43.00	44.00
45	44.00	45.00
46	45.00	46.00
47	46.00	47.00
48	47.00	48.00
49	48.00	49.00
50	49.00	50.00

鈺滿榮企業股份有限公司 ACMELEX CO., LTD.

TEL:886-2-85124595 FAX:886-2-85124322

0.0±0.38 SCALE: 1:1

0.00±0.25 UNIT: mm

0.000±0.15



TITLE: Pitch 1.0mm SMT Dual Row Type Pin Header Connector

PART NO:

APP BY: Hung

CHK BY: Cheryl

DR BY: Amos

A225