





CUSTOMER COPY

REV.	DESCRIPTION	APP.	DATE
A	NEW DESIGN	Amos	2009-06-04

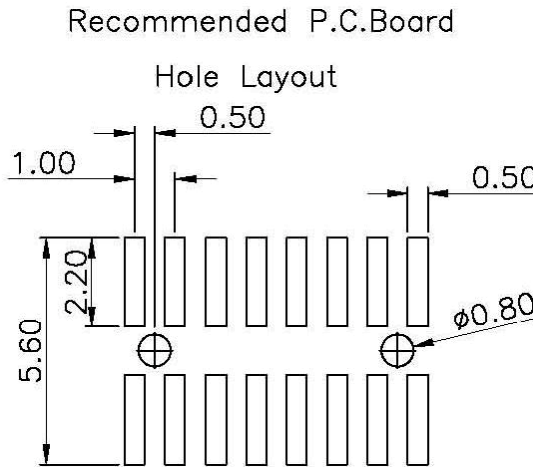

ORDER INFORMATION

170 40 XX XX X

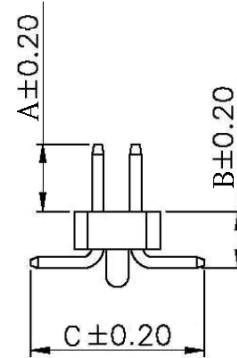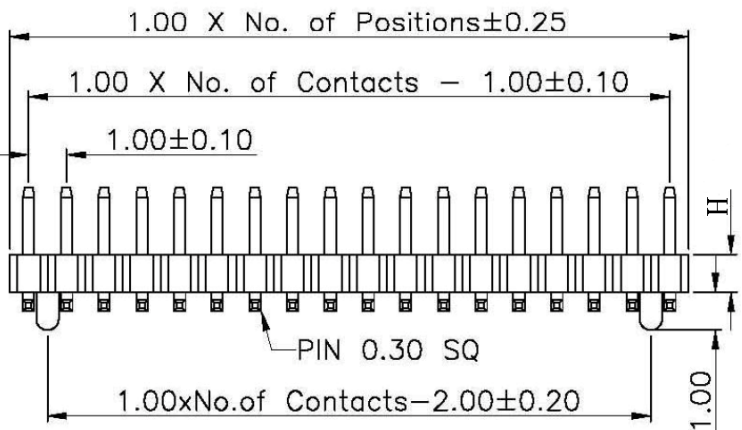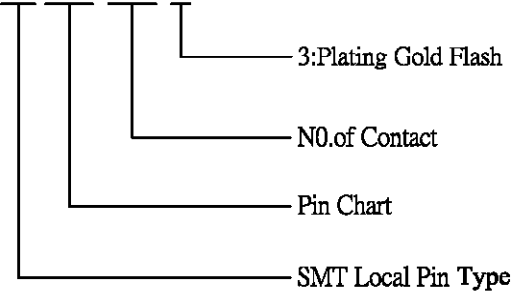

Specifications


Current Rating: 1Amp
 Insulation Resistance: 500MΩ Min.
 Dielectric Withstanding: 600VAC
 Contact Resistance: 20mΩ Max.
 Operating Temperature: -40°C to +105°C

Materials

Contact Material: Brass
 Insulator Material: Polyester, UL 94V-0
 NYLON-6T

Pin Chart

No.	A	B	C	H
00	1.80	1.30	4.60	1.0
01	2.00	1.30	5.20	1.0

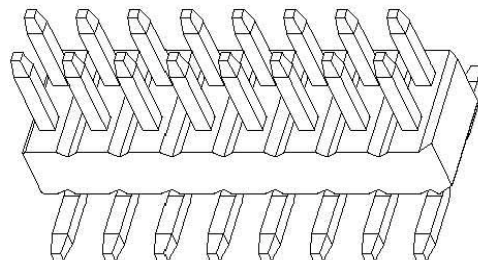

鈺滿榮企業股份有限公司 ACMELUX CO., LTD.

TEL: 886-2-85124595 FAX: 886-2-85124322

0.0±0.30	SCALE: 1:1	TITLE:	PART NO:
0.00±0.20	UNIT: mm	Pitch 1.0mm Dual Rows SMT Type Pin Header Connector	APP BY: <i>Hung</i>
0.000±0.1			CHK BY: <i>Cheryl</i>
MATERIAL: RoHS		DWG. NO. C17040XXXXXX	DR BY: <i>Amos</i> C050