
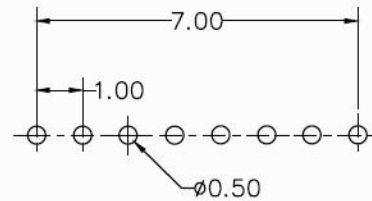
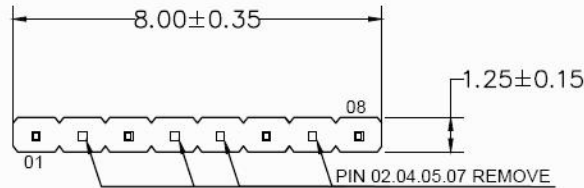


CUSTOMER COPY



REV.	DESCRIPTION	APP.	DATE
A	NEW DESIGN	Amos	2011-10-07

ORDER INFORMATION

170 58 00 XX X

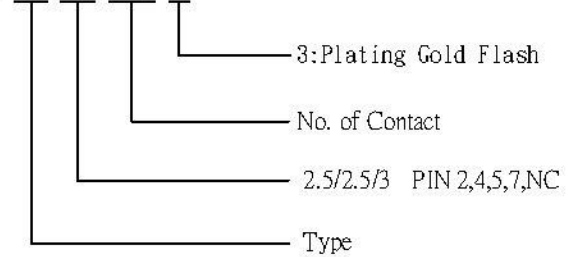

RECOMMENDED P.C.B LAYOUT

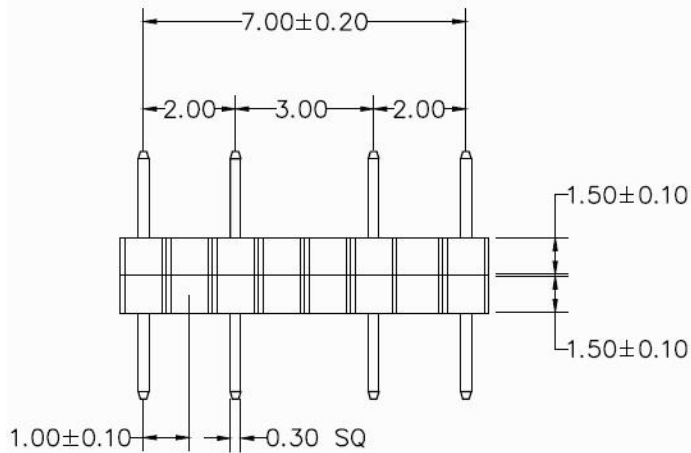

**MATERIAL**  
 HOUSING : NYLON 6T, UL94V-0  
 CONTACT : COPPER ALLOYS  
 PLATED : GOLD FLASH  
 COLOR : NATURAL(BLACK)

**SPECIFICATION**  
 CURRENT: 1A  
 OPERATING TEMPERATURE: -55°C TO +105°C  
 CONTACT RESISTANCE : 20 MILLIOHMS MAX  
 INSULATION RESISTANCE : 5000 MEGAOHMS MIN  
 DIELECTRIC STRENGTH : 1000 VAC MIN

A: 2.50 mm B: 2.50 mm C: 3.00 mm



鈺滿榮企業股份有限公司 ACMELUX CO., LTD.

TEL:886-2-85124595 FAX:886-2-85124322

0.0±0.30	SCALE: 1:1	TITLE:	PART NO:
0.00±0.25	UNIT: mm	PIN HEADER 1.0	APP BY: Hung
0.000±0.2		MATL: RoHS	CHK BY: Cheryl
		DWG. NO. 1705800XX3	DR BY: Amos

RoHS

A284