
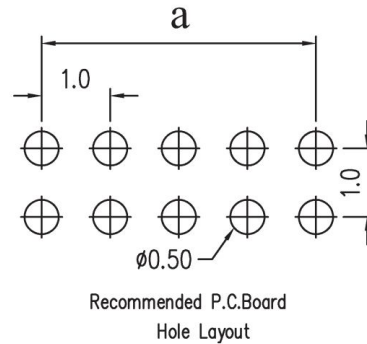


CUSTOMER COPY




REV.	DESCRIPTION	APP.	DATE
A	NEW DESIGN	Amos	2011-10-28

No. of Contacts	DIMENSIONS	
	a	b
10	4.00	5.00
12	5.00	6.00
14	6.00	7.00
16	7.00	8.00
18	8.00	9.00
20	9.00	10.00
22	10.00	11.00
24	11.00	12.00
26	12.00	13.00
28	13.00	14.00
30	14.00	15.00
32	15.00	16.00
34	16.00	17.00
36	17.00	18.00
38	18.00	19.00
40	19.00	20.00
42	20.00	21.00
44	21.00	22.00
46	22.00	23.00
48	23.00	24.00
50	24.00	25.00
52	25.00	26.00
54	26.00	27.00
56	27.00	28.00
58	28.00	29.00
60	29.00	30.00
62	30.00	31.00
64	31.00	32.00
66	32.00	33.00
68	33.00	34.00
70	34.00	35.00
72	35.00	36.00
74	36.00	37.00
76	37.00	38.00
78	38.00	39.00
80	39.00	40.00
82	40.00	41.00
84	41.00	42.00
86	42.00	43.00
88	43.00	44.00
90	44.00	45.00
92	45.00	46.00
94	46.00	47.00
96	47.00	48.00
98	48.00	49.00
100	49.00	50.00

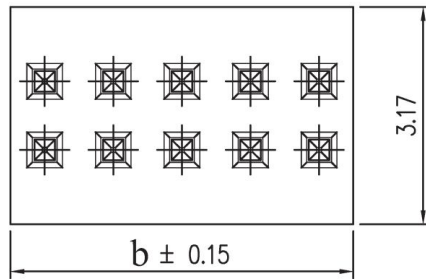

ORDER INFORMATION

170 80 00 XX X

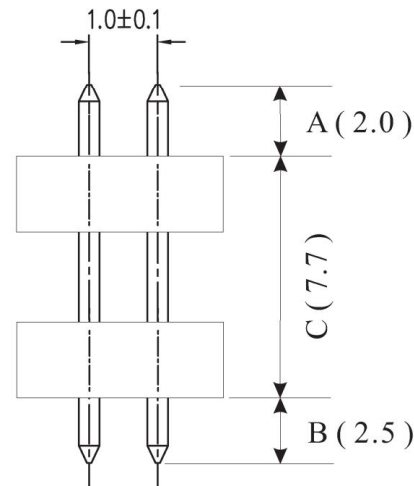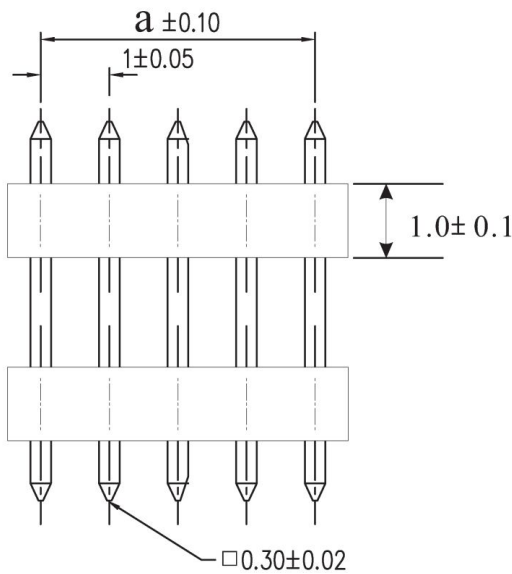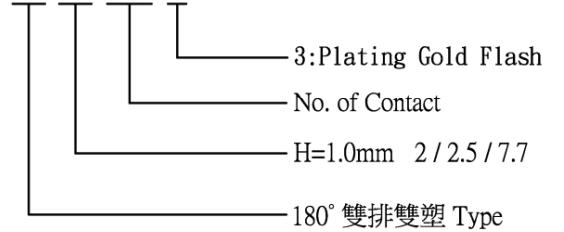

SPECIFICATIONS

Current rating : 1 Amp  
 Dielectric withstanding : AC 500 V  
 Insulation resistance : 5000 Megohms Min.  
 Operating Temperature : - 40°C ~ + 105°C  
 Max Processing Temp : 230°C for 30 seconds  
 Contact Material : Copper Alloy  
 Insulator Material : Polyester, UL 94V-0  
 Finish : Tin, Gold plated



鈺滿榮企業股份有限公司 ACMELUX CO., LTD.

TEL:886-2-85124595

FAX:886-2-85124322

0.0±0.38	SCALE: 1:1	TITLE:	PART NO:
0.00±0.25	UNIT: mm	Pitch 1.0mm 180° 雙排雙塑 Type Pin Header Connector	APP BY: Hung
0.000±0.13			CHK BY: Cheryl
		MATL: RoHS	DR BY: Amos
		DWG. NO. C1708000XXX	A225