REV.	DESCRIPTION	APP.	DATE
A	NEW DESIGN	Amos	2013-01-09

CUSTOMER COPY

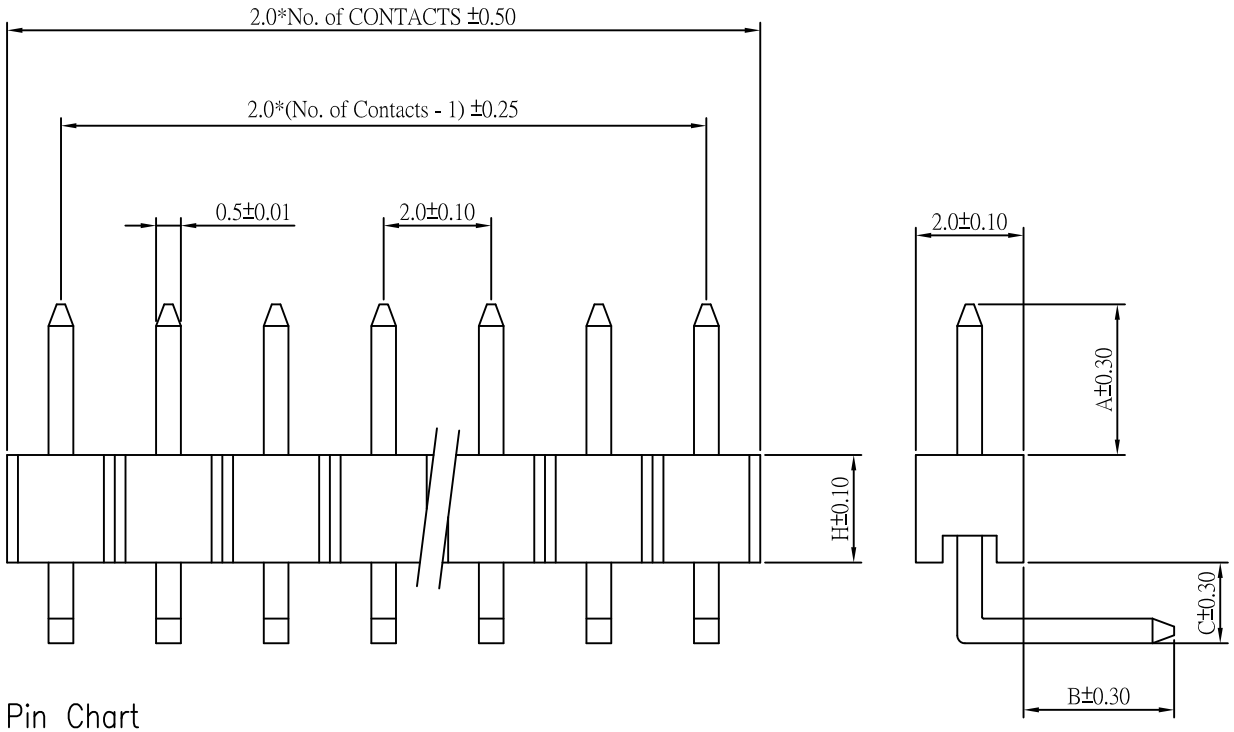

ORDER INFORMATION

173 04 XX XX X

- 3:Plating Gold Flash
- No. of Contact (02 ~ 40)
- Pin chart
- Type

SPECIFICATION

* Current Rating: 1 A
* Withstanding Voltage: 600 VAC (1 min.)
* Insulation Resistance: 1000 Megohms MIN.
* Contact Resistance: 30 Milliohms MAX.
* Operating Temperature: −40°C to +85°C
* Retention Force: 600g MIN.

MATERIAL

* Contact: BRASS 0.50mm square post
* Insulator: High temperature plastic
* Plating: All Gold



Recommended P.C. Board Hole Layout

RoHS

Pin Chart

No.	A	B	C	H
00	4.00	2.80	2.00	2.00
01	3.00	3.00	1.20	2.00
02	2.50	2.50	0.50	2.00
03	3.50	2.50	0.50	2.00
04	3.70	3.00	4.50	2.00
05	4.00	4.98	6.00	2.00
06	3.50	3.50	2.50	2.00
07	4.00	2.80	1.80	2.00

No.	A	B	C	H
08	4.00	2.80	1.25	2.00
09	3.60	3.60	2.25	2.00
10	3.00	2.00	2.00	2.00
11	2.00	5.00	1.00	2.00
12	4.00	2.40	1.00	1.50
13	0.00	6.80	2.00	1.50
14	3.80	3.00	1.55	2.00
15				

No.	A	B	C	H

鈺滿榮企業股份有限公司 ACMELUX C0., LTD.
TEL:886-2-85124595 FAX:886-2-85124322

0.0±0.30 0.00±0.20 0.000±0.1	SCALE: 1:1 UNIT: mm	TITLE: Pitch 2.0mm(.079") 90° Single Row Type Center Pin Header Connector	PART NO: 109220 APP BY: Hung CHK BY: Cheryl DR BY: Amos
		MATL: RoHS (Nylon 6T) DWG. NO. C17304XXXXX	A021