


CUSTOMER COPY




REV.	DESCRIPTION	APP.	DATE
A	NEW DESIGN	Amos	2013-01-30

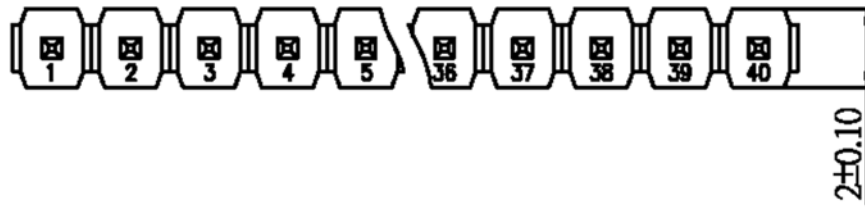

ORDER INFORMATION

173 12 61 XX X

- 1: Plating Tin
- 3: Plating Gold Flash
- No. of Contact
- 61: 臥式 4mm/1.3mm/1.5mm
- 12: 單排 SMT Type

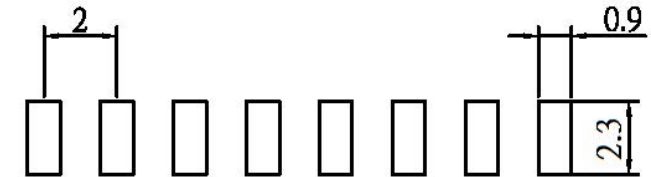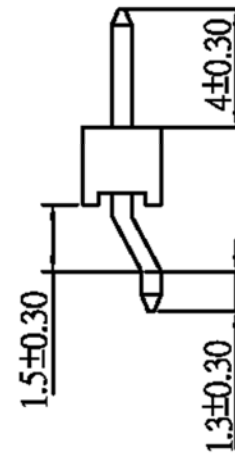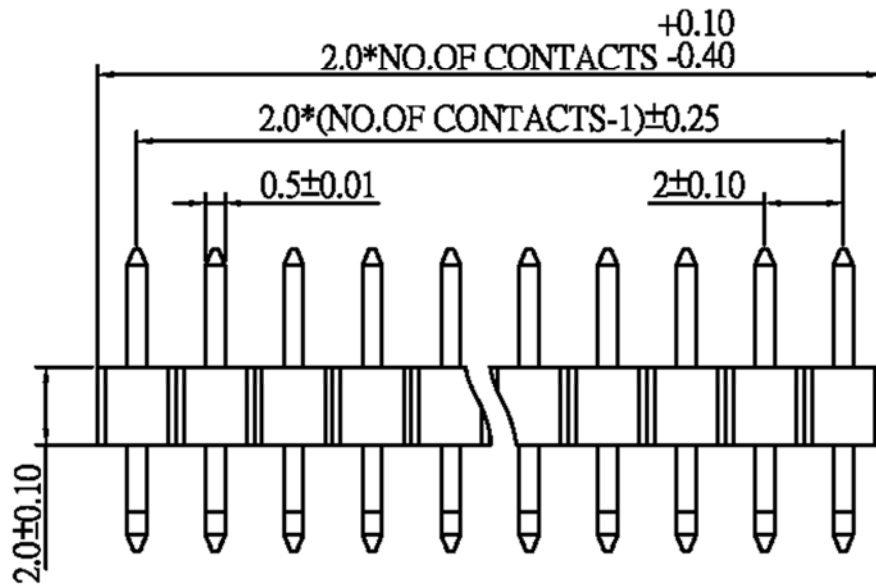

Recommended P.C.Board Hold Layout



SPECIFICATION

Current Rating: 1 A
 Withstanding Voltage: 500V AC
 Insulation Resistance: 1000 Megohms Min.
 Contact Resistance: 20 Milliohms Max.
 Operating Temperature: -55°C to +105°C (NYLON 6T)

MATERIAL

Contact: Copper Alloy
 Insulator: Polyester, UL94V-0 NYLON 6T
 Plating: All Gold or Tin



鈺滿榮企業股份有限公司 ACMELUX CO., LTD.

TEL: 886-2-85124595

FAX: 886-2-85124322

0.0±0.30	SCALE: 1:1	TITLE: Pitch 2.0mm Single Row SMT Type Pin Header Connector	PART NO:
0.00±0.20	UNIT: mm	MATERIAL: RoHS (Nylon 6T)	APP BY: <i>Hung</i>
0.000±0.1			CHK BY: <i>Cheryl</i>
DWG. NO. C1731261XXX		DR BY: <i>Amos</i>	