

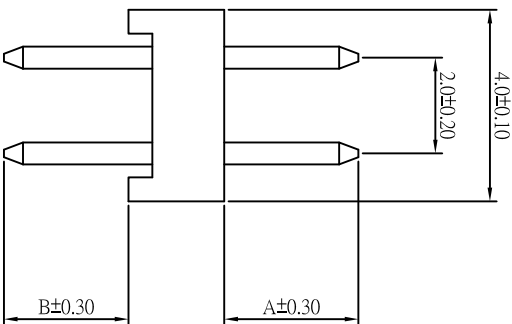
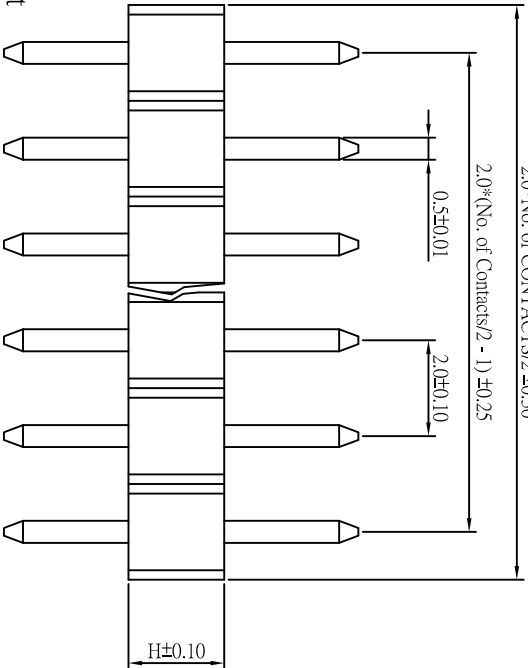


CUSTOMER COPY

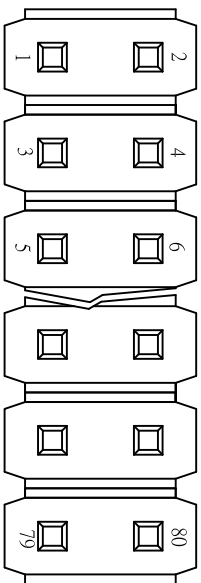

Recommended P.C. Board Hole Layout

- * Retention Force: 600g MIN.
- * Operating Temperature: -40°C to +85°C
- * Contact Resistance: 30 Milliohms MAX.
- * Insulation Resistance: 1000 Megohms MIN.
- * Withstanding Voltage: 600 VAC (1 min.)
- * Current Rating: 1 A

MATERIAL

- * Contact: BRASS
- * Insulator: High temperature plastic
- * Plating: All Gold

SPECIFICATION

ORDER INFORMATION
173 28 XX XX X

Plating:
3: All Gold
4: All Gold30u"

Pin chart
Type (RoHS)

No. Of Contacts
(04 ~ 80)

No.	A	B	H	No.	A	B	H	No.	A	B	H	No.	A	B	H
00	4.00	2.80	2.00	08	8.00	2.80	2.00	16	2.00	2.00	2.00	24	3.00	3.00	2.00
01	4.00	2.80	1.50	09	6.00	2.60	2.00	17	3.50	2.50	1.50	25	3.60	2.80	2.00
02	4.00	2.60	1.50	10	5.00	2.80	2.00	18	5.50	2.60	1.50	26	2.50	2.50	2.00
03	6.00	2.60	1.50	11	3.50	3.50	2.00	19	6.90	2.80	2.00	27	3.00	10.7	2.00
04	3.80	2.90	2.00	12	2.80	2.00	2.00	20	6.00	2.80	2.00	28	5.50	1.50	1.50
05	2.00	1.20	1.50	13	4.50	2.30	2.00	21	17.00	3.00	2.00				
06	5.50	2.80	2.00	14	6.00	3.00	2.00	22	15.00	3.00	2.00				
07	2.00	2.80	2.00	15	5.00	3.00	2.00	23	10.00	3.00	2.00				



钰满荣企业股份有限公司 ACME LUX CO., LTD.

TEL:886-2-85124595

FAX:886-2-85124322

0.0±0.30 SCALE: 1:1 TITLE:
0.00±0.20 UNIT: mm Pitch 2.00X2.00mm (0.79"*0.79")
0.000±0.1 Pin Header Dual Row Connector

PART NO:

APP BY: Hung

CHK BY: Cheryl

MATL: RoHS (Nylon 6T)

DR BY: Amos

DWG. NO. C17328XXXXXX



REV.	DESCRIPTION	APP.	DATE
A	NEW DESIGN	Amos	2009-06-12