
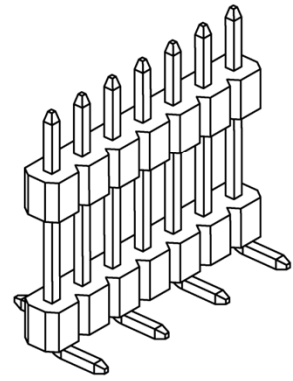


CUSTOMER COPY



REV.	DESCRIPTION	APP.	DATE
A	NEW DESIGN	Amos	2011-07-19

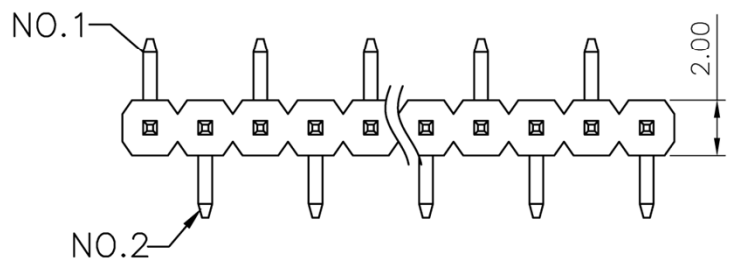

ORDER INFORMATION

173 52 50 XX X

- 3:Plating Gold Flash
- No. of Contact
- B Type H=2.0mm  
2.5mm / 9.2mm / 4mm
- 單排雙塑 SMT Type

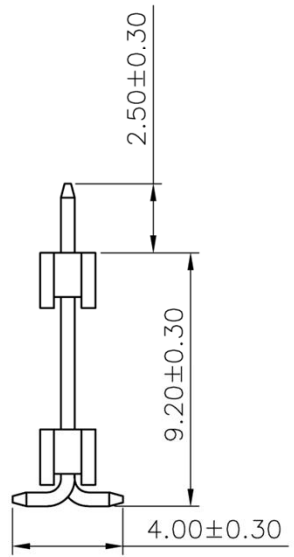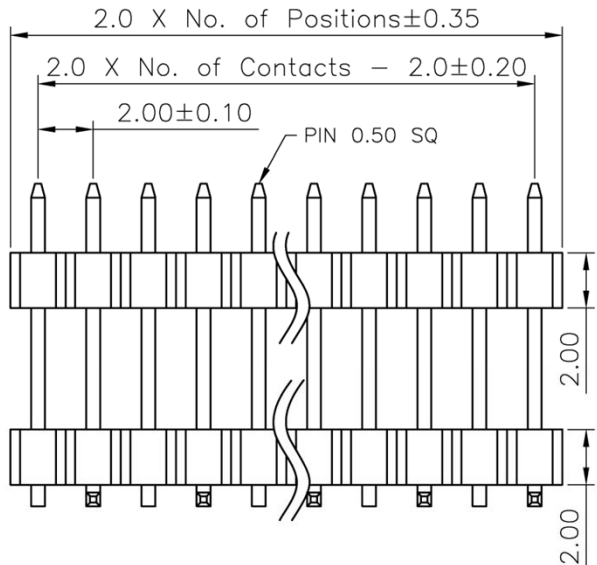

Specifications


- Current Rating: 2Amp
- Insulation Resistance: 1000MΩ Min.
- Dielectric Withstanding: 500V AC
- Contact Resistance: 20mΩ Max.
- Operating Temperature: -40°C to +105°C




Materials

- Contact Material: Brass
- Insulation Material: Polyester, UL 94V-0  
Nylon 6T

All materials must be GP materials

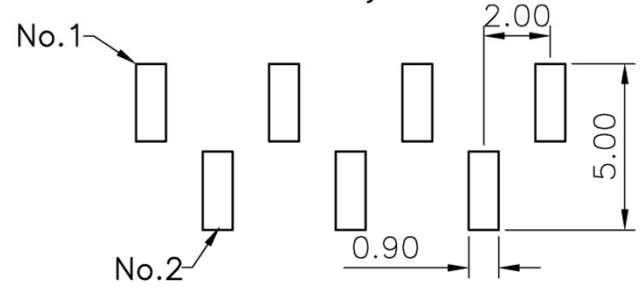Hole Layout



 <b>鈺滿榮企業股份有限公司 ACMELUX CO., LTD.</b> TEL:886-2-85124595 FAX:886-2-85124322			
0.0±0.30	SCALE: 1:1	TITLE: Pitch 2.0mm Dual Rows SMT Type Pin Header Connector	PART NO:
0.00±0.20	UNIT: mm		APP BY: Hung
0.000±0.1			CHK BY: Cheryl
 		MATL: RoHS	DR BY: Amos
		DWG. NO. C1735250XXX	C050