


CUSTOMER COPY


REV.	DESCRIPTION	APP.	DATE
A	NEW DESIGN	Amos	2010-12-07

2.0 x No of Positions ± 0.50


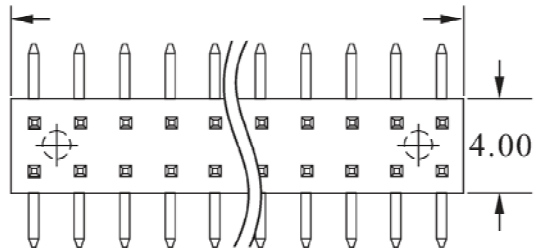


ORDER INFORMATION

173 76 00 XX X

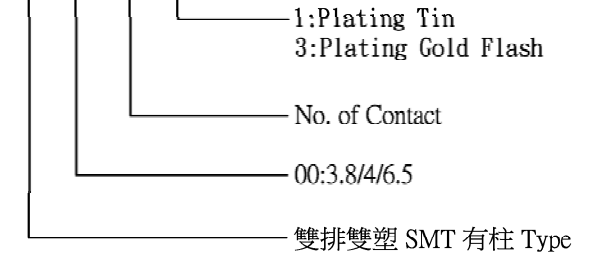

2.0 x (No of Contacts / 2-1)

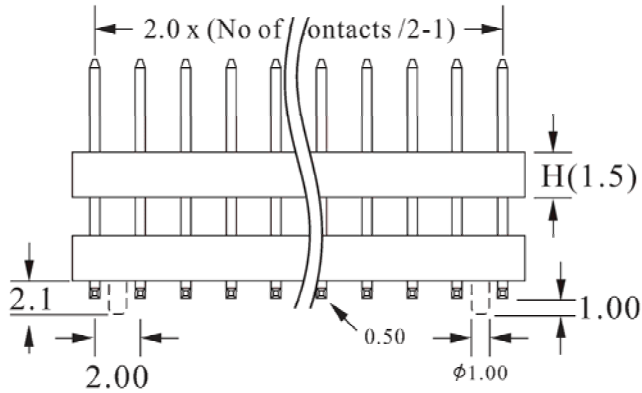


SPECIFICATIONS

Current Rating : 1 Amps
 Insulator resistance : 5000 Megohms
 Dielectric withstanding : AC 500V
 Operating Temperature : -40° — $+105^{\circ}$ C

MATERIAL :

Housing : Nylon 6T.
 Terminal : Brass

Recommended P.C.Board Hole Layout :

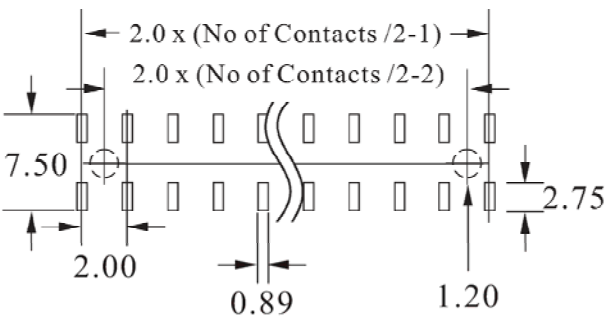

RoHS



鈺滿榮企業股份有限公司 ACMELUX CO., LTD.

TEL:886-2-85124595

FAX:886-2-85124322

0.0 \pm 0.38	SCALE: 1:1	TITLE: Pitch 2.0mm Double Plastic Dual Rows SMT Type Pin Header Connector	PART NO:
0.00 \pm 0.25	UNIT: mm		APP BY: Hung
0.000 \pm 0.15			CHK BY: Cheryl
		MATL: RoHS	DR BY: Amos
DWG. NO. C1737600XXX		A225	