

CUSTOMER COPY


REV.	DESCRIPTION	APP.	DATE
A	NEW DESIGN		



*Order Information

173 86 00 XX X

- 3 : Glod flash
- XX : No Of Contact
- 00 : 4/6.8 H:2.0
- 86 : 90度 smt

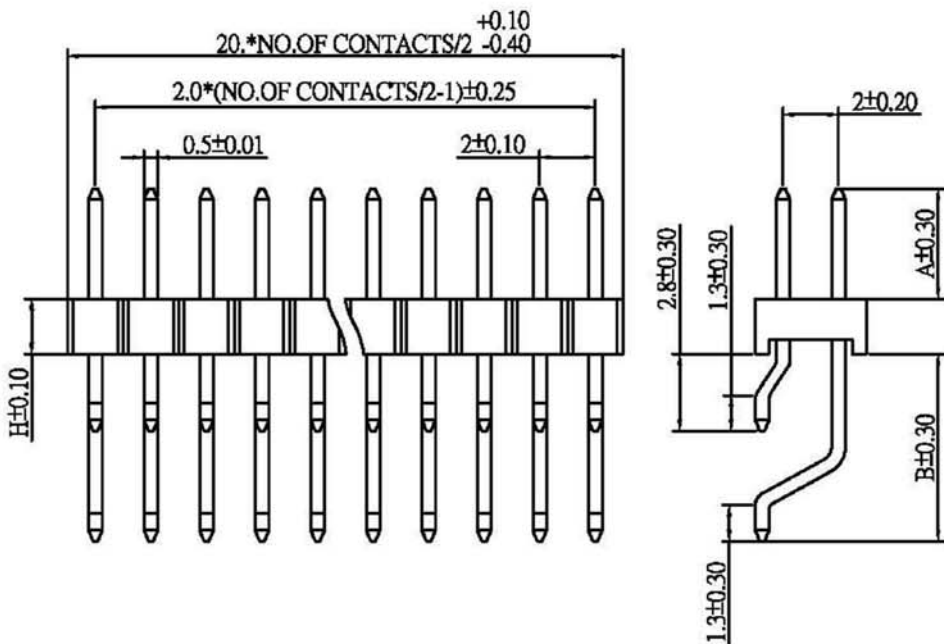


MATERIAL

Contact: Coppery Alloy
 Insulator: Polyester,UL94V-0
 NYLON 6T
 Plating: All Gold or Tin

SPECIFICATION

Current Rating: 1 A
 Withstanding Voltage: 500V AC
 Insulation Resistance: 1000 Megohms Min.
 Contact Resistance: 20 Milliohms Max.
 Operating Temperature: -55°C to +105°C (NYLON 6T)



Recommended P.C.Board
 Hold Layout

Pin Chart

	A	B	H
00	4.0	6.8	2.0



鈺滿榮企業股份有限公司 CMELUX CO., LTD.

TEL:886-2-85124595

FAX:886-2-85124322

0.0±0.30	SCALE:	TITLE:	PART NO:
0.00±0.20	UNIT: mm	2.0*2.0mm Pin Header Dual Row 90° Smt Type	APP BY: Hung
0.000±0.1		MATL: ROHS	CHK BY: Cheryl
		DWG. NO. C1738600XXX	DR BY: Ader A021

