


CUSTOMER COPY

ORDER INFORMATION

174 36 XX XX X

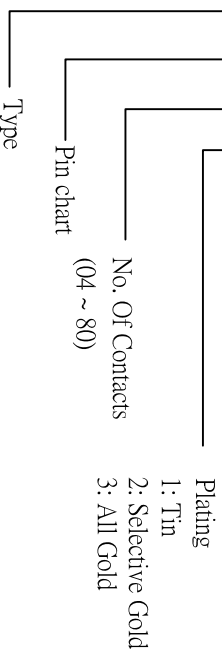

- Plating
 1: Tin
 2: Selective Gold
 3: All Gold


REV	ECN NO.	APP.	DATE
A	NEW DESIGN		

SPECIFICATION

- * Current Rating: 3 A
- * Withstanding Voltage: 800 VAC (1 min.)
- * Insulation Resistance: 1000 Megohms MIN.
- * Contact Resistance: 30 Milliohms MAX.
- * Operating Temperature: -55°C to +105°C
- * Retention Force: 750g MIN.

MATERIAL


- * Contact: Brass , 0.64mm square post
- * Insulator: High temperature plastic Nylon 6T
- * Plating: Selective Gold or All Gold

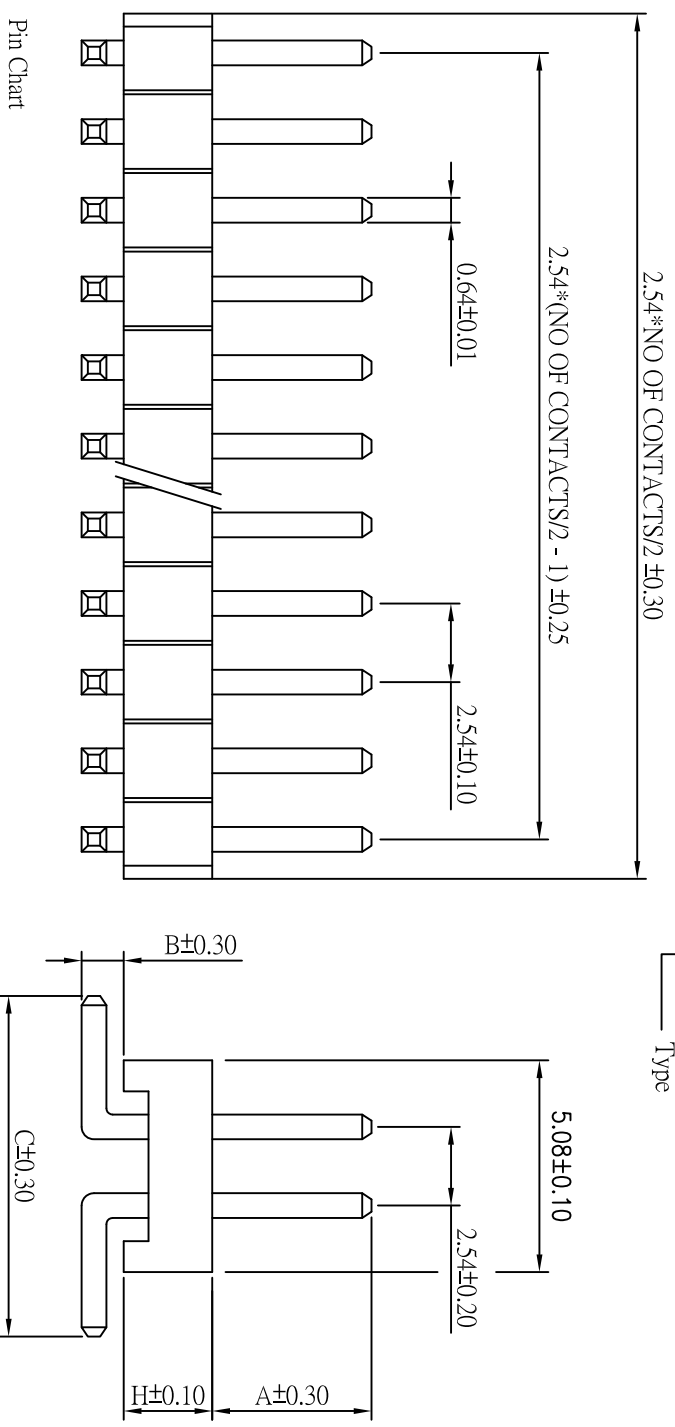

Pin Chart

No.	A	B	C	H
00	6.00	1.40	7.62	2.54
01	6.00	3.90	7.62	2.54
02	6.00	0.64	9.00	2.54
03	5.00	1.46	7.62	2.54
04	3.05	1.27	7.75	1.50
05	6.00	1.80	7.62	2.54
06	6.00	3.30	7.62	2.54
07	6.00	0.76	7.50	2.54
08	6.00	1.40	6.50	2.54

No.	A	B	C	H
09	4.00	1.40	7.62	2.54
10	3.00	1.40	7.62	2.54
11	3.00	1.27	7.62	2.54
12				
13				
14				
15				
16				
17				

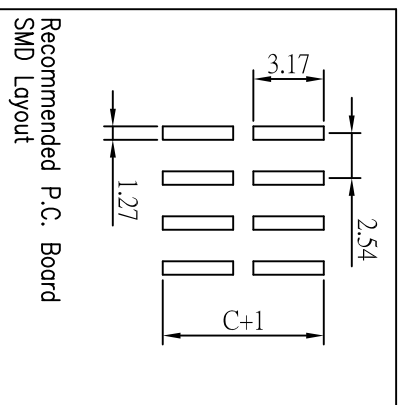

ACMELUX CO., LTD.
 TEL:886-2-85124595 FAX:886-2-85124322

0.0±	SCALE:	TITLE:	PART NO: 111900
0.00±	UNIT:	2.54X2.54MM (.100"*.100") PIN	APP BY:
0.000±	mm	HEADER SMD Dual Row	CHK BY:
		MATL: RoHS	DR BY: Amos
		DWG. NO. C17436XXXX	