

CUSTOMER COPY





REV.	DESCRIPTION	APP.	DATE
A	NEW DESIGN	Amos	2011-10-28

ORDER INFORMATION

185 48 00 XX X

- 3:Plating Gold Flash
- No. of Contact
- H=2.05mm W=3.9mm
- SMT Type

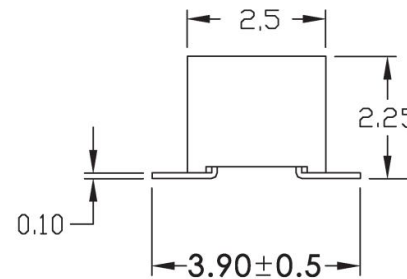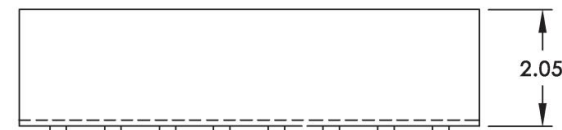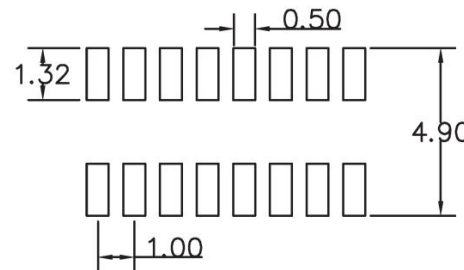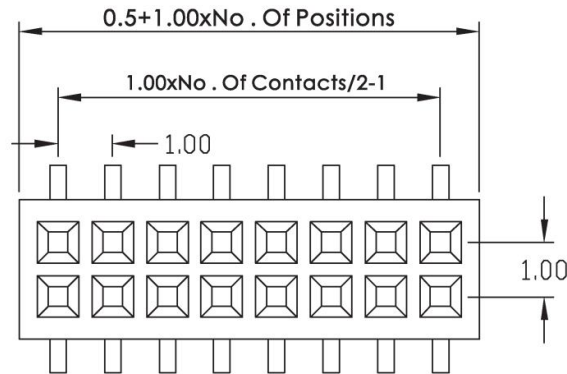

Recommended PCB Layout



SPECIFICATIONS

- Current rating : 1 Amp
- Dielectric Withstanding : AC 200V
- Contact resistance : 20 Milliohms Max.
- Insulation resistance : 500 Megohms Min.
- Temperature range : - 40 °C ~ + 105 °C
- Contact : Copper Alloys
- Housing : Thermoplastic UL94V-0



 <b>鈺滿榮企業股份有限公司 ACMELUX CO., LTD.</b> TEL:886-2-85124595 FAX:886-2-85124322			
0.0±0.38	SCALE: 1:1	TITLE:	PART NO:
0.00±0.25	UNIT: mm	Pitch 1.0mm SMT Type Female Header Connector	APP BY: Hung
0.000±0.13			CHK BY: Cheryl
		MATL: RoHS	DR BY: Amos
		DWG. NO. C1854800XXX	A225