

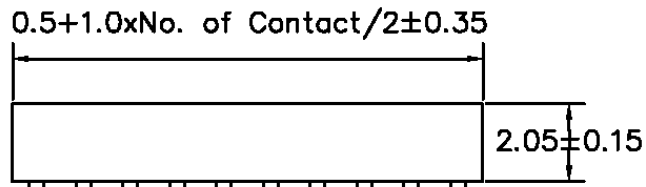
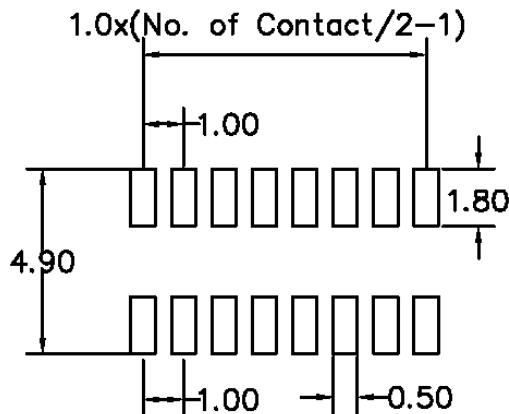


CUSTOMER COPY

REV.	DESCRIPTION	APP.	DATE
A	NEW DESIGN	Amos	2013-02-01

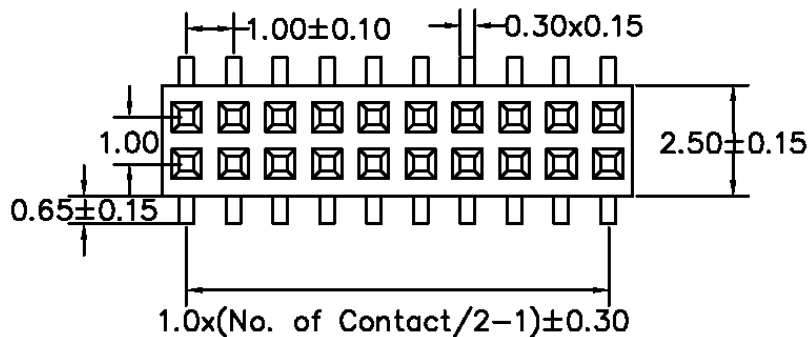

P.C.B. LAYOUT

ORDER INFORMATION

185 48 01 XX X

- 3:Plating Gold Flash
- No. of Contact
- H:2.05mm W:3.9mm
- Dual Rows SMT Type

MATERIAL

HOUSING : NYLON 6T,UL94V-0  
 CONTACT : COPPER ALLOYS  
 PLATED : GOLD-FLASH  
 COLOR : BLACK

SPECIFICATION

CURRENT: 1A  
 OPERATING TEMPERATURE: -40°C TO +105°C  
 CONTACT RESISTANCE : 20 MILLIOHMS MAX  
 INSULATION RESISTANCE : 5000 MEGAOHMS MIN  
 WITHSTAND VOLTAGE : 500 V AC MIN  
 NUMBER OF CONTACTS : 02 TO 40 CONTACTS



鈺滿榮企業股份有限公司 ACMELUX CO., LTD.

TEL:886-2-85124595

FAX:886-2-85124322

0.0±0.38	SCALE: 1:1	TITLE:	PART NO:
0.00±0.25	UNIT: mm	Pitch 1.0mm Dual Rows SMT Type	APP BY: <i>Hung</i>
0.000±0.15		Pin Header Connector	CHK BY: <i>Cheryl</i>
		MATL: RoHS (Nylon 6T)	DR BY: <i>Amos</i>
		DWG. NO. C1854801XXX	