


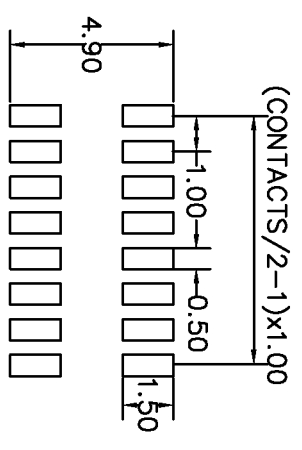
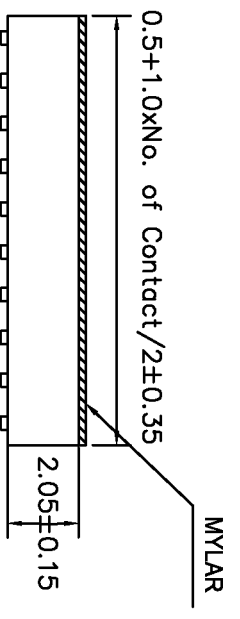


CUSTOMER COPY

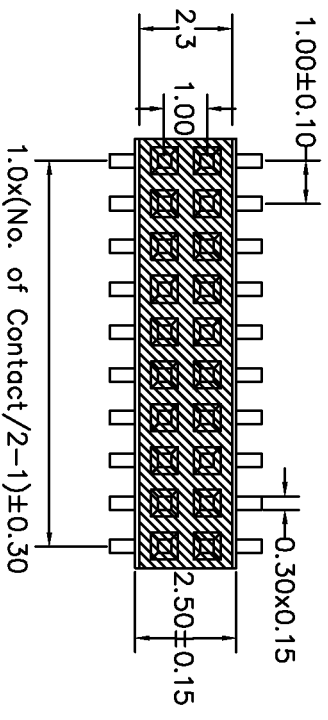

P.C.B. LAYOUT

ORDER INFORMATION
185 52 01 XX X

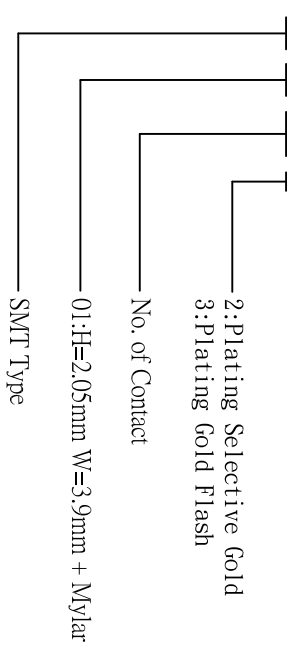

MATERIAL
HOUSING : NYLON 6T, UL94V-0
CONTACT : PHOSPHOR BRONZE
PLATED : GOLD-FLASH
COLOR : BLACK

SPECIFICATION

CURRENT : 1A
OPERATING TEMPERATURE : -40 °C TO +105 °C
CONTACT RESISTANCE : 20 MILLIOHMS MAX
INSULATION RESISTANCE: 5000 MEGAOHMS MIN
WITHSTAND VOLTAGE : 500 V AC MIN
NUMBER OF CONTACTS : 08TO 40 CONTACTS



钰满荣企业股份有限公司 ACME LUX CO., LTD.
TEL.:886-2-85124595 FAX:886-2-85124322

0.0±0.38	SCALE: 1:1	TITLE:	PART NO:
0.00±0.25	UNIT: mm	Pitch 1.0mm SMT Type	APP BY: Hung
0.000±0.2		Female Header Connector	CHK BY: Cheryl
		MATL: RoHS	DR BY: Amos
		DWG. NO. C1855201XXX	

REV.	DESCRIPTION	APP.	DATE
A	NEW DESIGN	Amos	2014-03-06