

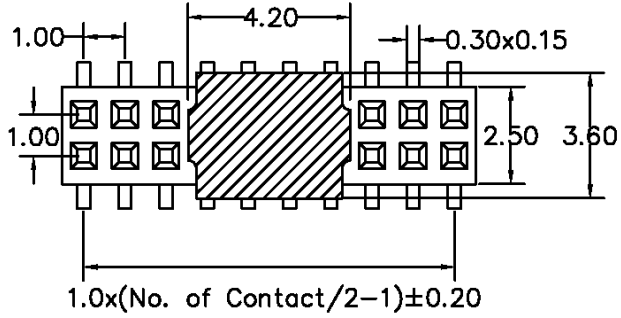
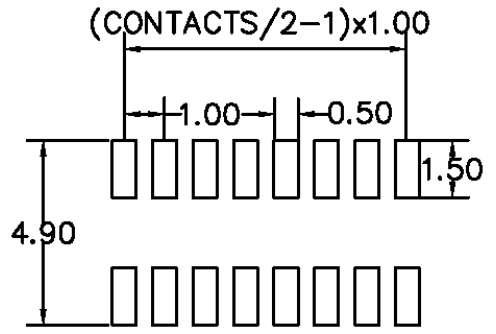



CUSTOMER COPY

REV.	DESCRIPTION	APP.	DATE
A	NEW DESIGN	Amos	2010-10-08

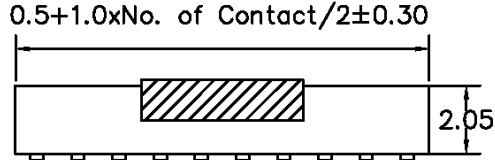

ORDER INFORMATION

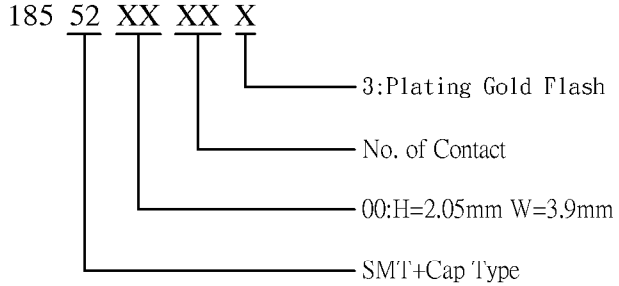


MATERIAL
 HOUSING : NYLON 6T,UL94V-0
 CONTACT : PHOSPHOR BRONZE
 PLATED : GOLD-FLASH
 COLOR : NATURAL(BLACK)

SPECIFICATION
 CURRENT : 1A
 OPERATING TEMPERAURE : -40 °C TO +105 °C
 CONTACT RESISTANCE : 20 MILLIOHMS MAX
 INSULATION RESISTANCE: 5000 MEGAOHMS MIN
 WITHSTAND VOLTAGE : 500 V AC MIN

P.C.B. LAYOUT




鈺滿榮企業股份有限公司 ACMELUX CO., LTD.
 TEL:886-2-85124595 FAX:886-2-85124322

0.0±0.38	SCALE: 1:1	TITLE: Pitch 1.0mm SMT Type Female Header Connector	PART NO:
0.00±0.25	UNIT: mm		APP BY: Hung
0.000±0.2		MATL: RoHS	CHK BY: Cheryl
		DWG. NO. C18552XXXXX	DR BY: Amos

A284