
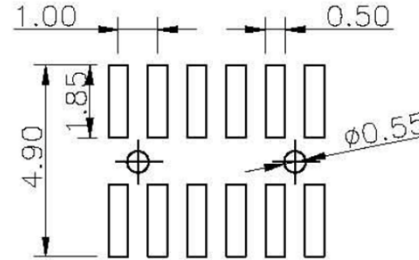


CUSTOMER COPY

REV.	DESCRIPTION	APP.	DATE
A	NEW DESIGN		

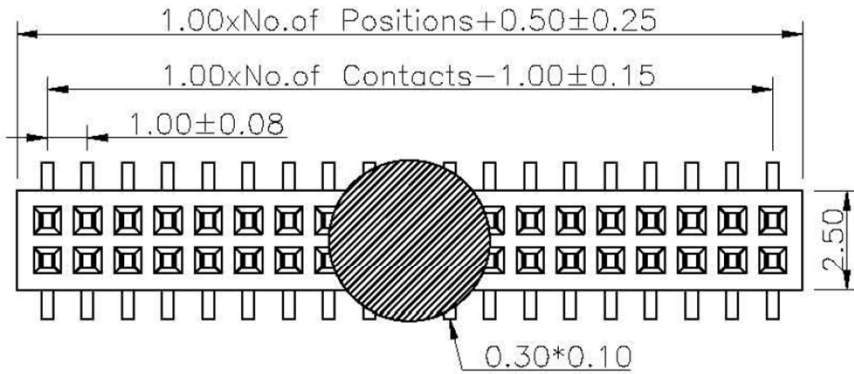

RECOMMENDED P.C.BOARD LAYOUT

ORDER INFORMATION

185 58 XX XX X



- 2:Plating Selective Gold
- 3:Plating Gold Flash
- No. of Contact
- 52:H=2.0mm W=4.25mm Reel
- 53:H=2.0mm W=4.25mm Tube
- SMT Type

Specifications

- Current Rating: 0.5Amp
- Insulation Resistance: 500M ΩMin.
- Dielectric Withstanding: 200VAC
- Contact Resistance: 40mΩ Max.
- Operating Temperature:-40°C to +105°C

Materials

- Contact Material: Phosphor Bronze
- Insulator Material: Polyester, UL 94V-0 Nylon 6T

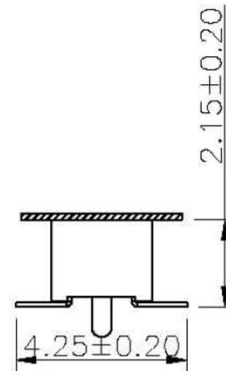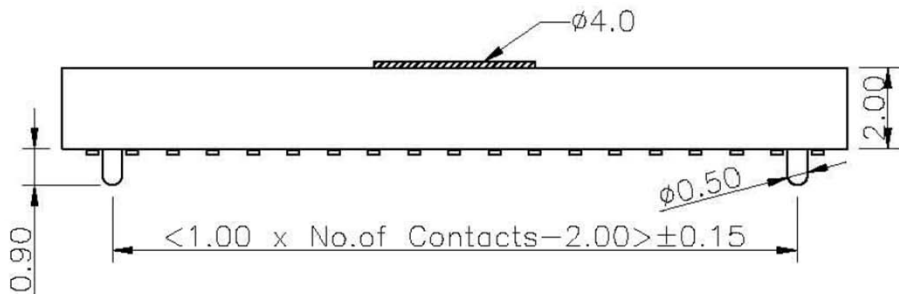

鈺滿榮企業股份有限公司 ACMELUX CO., LTD.

TEL: 886-2-85124595 FAX: 886-2-85124322

0.0±0.30	SCALE: 1:1	TITLE:	PART NO:
0.00±0.20	UNIT: mm	Pitch 1.0mm Mylar Dual Row	APP BY: <i>Hung</i>
0.000±0.1		SMT Type Female Header Conn.	CHK BY: <i>Cheryl</i>
		MATL: RoHS	DR BY: <i>Amos</i> C050
		DWG. NO. C18558XXXXX	