


CUSTOMER COPY

REV.	DESCRIPTION	APP.	DATE
A	NEW DESIGN	Amos	2011-01-14

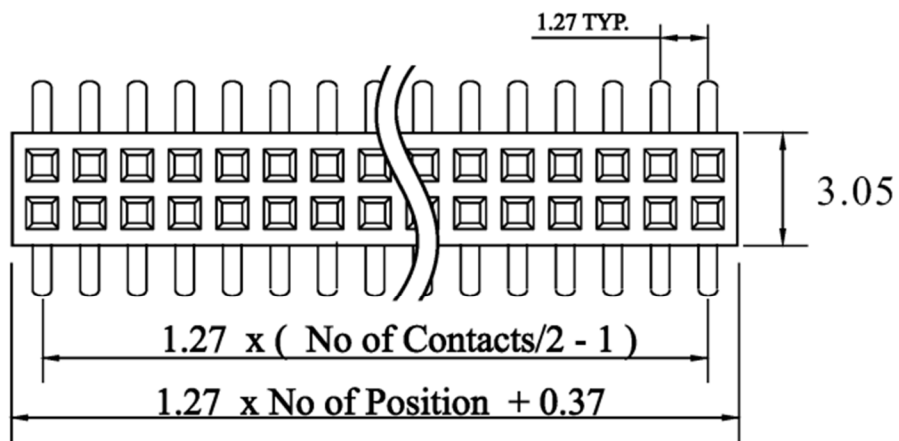

ORDER INFORMATION

186 48 60 XX X



2:Plating Selective Gold
3:Plating Gold Flash

No. of Contact

Pin Chart

Type

Recommended P.C.Board Hole Layout :

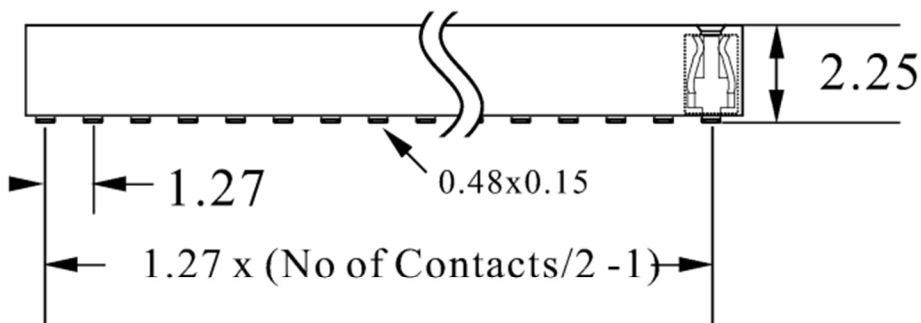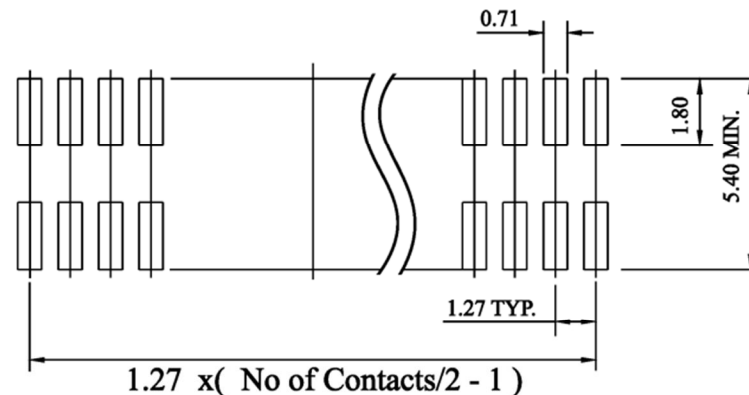


SPECIFICATIONS

Current rating : 1 Amps
Dielectric Withstanding : AC 500V
Contact resistance : 20 Milliohms Max.
Insulation resistance : 5000 Megohms Min.
Temperature range : - 40°C ~ + 105°C

MATERIAL :

Housing : High Temperature Thermoplastic
Terminal : Phosphor Bronze

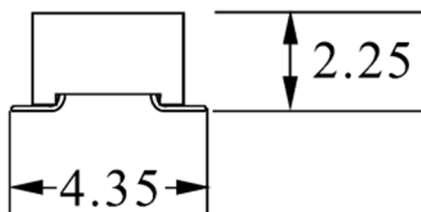

鈺滿榮企業股份有限公司 ACME LUX CO., LTD.

TEL:886-2-85124595

FAX:886-2-85124322

0.0±0.30	SCALE: 1:1	TITLE:	PART NO:
0.00±0.20	UNIT: mm	Pitch 1.27mm Dual Rows SMT Type Female Header Connector	APP BY: Hung
0.000±0.15		MATL: RoHS	CHK BY: Cheryl
		DWG. NO. C1864860XXX	DR BY: Amos



A225