


CUSTOMER COPY

REV.	DESCRIPTION	APP.	DATE
A	NEW DESIGN	Amos	2011-02-21

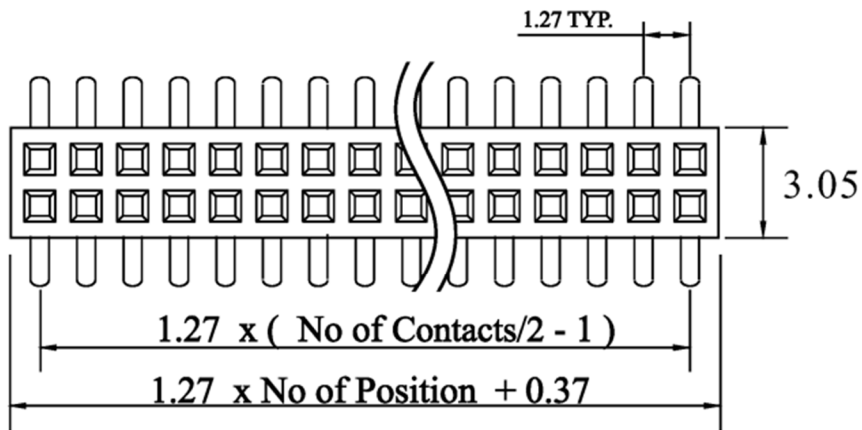

ORDER INFORMATION

1865438 XX X

3:Plating Gold Flash

No. of Contact




SPECIFICATIONS


Current rating : 1 Amps
 Dielectric Withstanding : AC 500V
 Contact resistance : 20 Milliohms Max.
 Insulation resistance : 5000 Megohms Min.
 Temperature range : - 40°C ~ + 105°C



MATERIAL :

Housing : High Temperature Thermoplastic
 Terminal : Phosphor Bronze

Recommended P.C.Board Hole Layout :

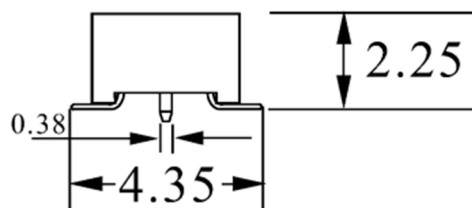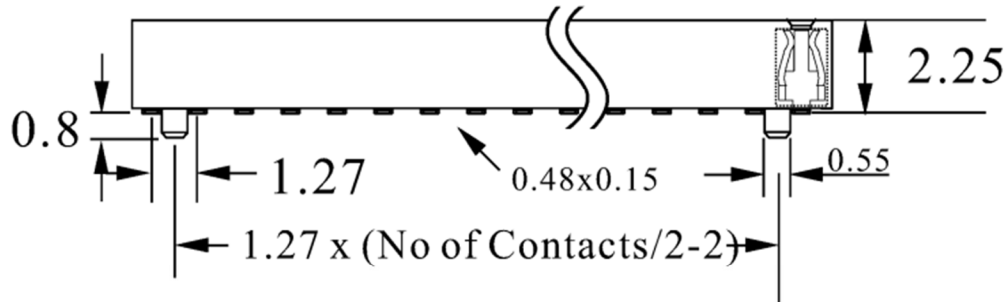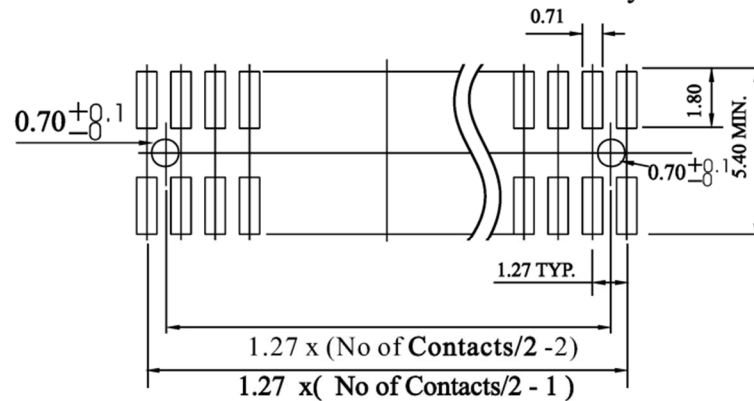

 鈺滿榮企業股份有限公司 ACMELUX CO., LTD.
 TEL:886-2-85124595 FAX:886-2-85124322

0.0 \pm 0.30	SCALE: 1:1	TITLE:	PART NO:
0.00 \pm 0.20	UNIT: mm	Pitch 1.27mm Dual Rows SMT	APP BY: Hung
0.000 \pm 0.15		Type Female Header Connector	CHK BY: Cheryl
		MATL: RoHS (LCP)	DR BY: Amos
		DWG. NO. C1865438XXX	A225