



CUSTOMER COPY

REV.	DESCRIPTION	APP.	DATE
A	NEW DESIGN	Amos	2010-07-01

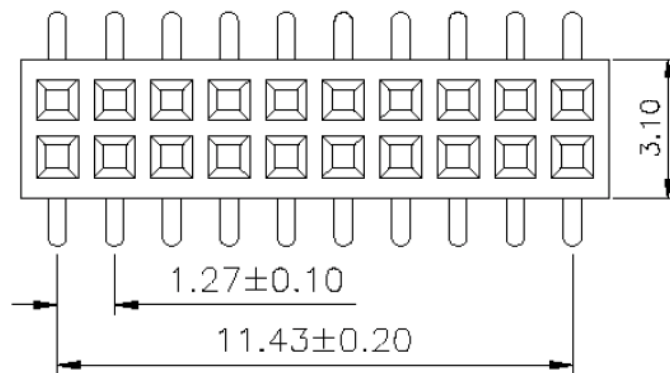

RECOMMENDED P.C.B LAYOUT

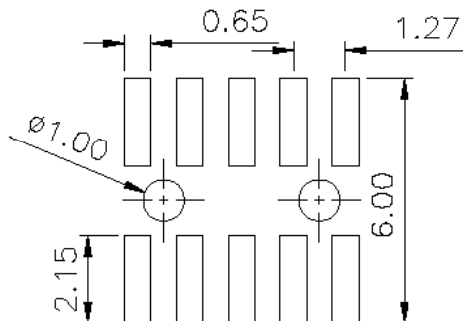

ORDER INFORMATION

186 54 54 XX X

2:Plating Selective Gold
3:Plating Gold Flash

No. of Contact

W=4.8mm H=4.5mm

SMT有柱 Type

Specifications

Current Rating: 1Amp

Insulation Resistance: 1000MΩ Min.

Dielectric Withstanding: 300V AC

Contact Resistance: 20mΩ Max.

Operating Temperature: -40°C to +105°C



Materials

Contact Material: Phosphor Bronze

Insulation Material: Polyester, UL 94V-0

NYLON-6T

All materials must be GP materials

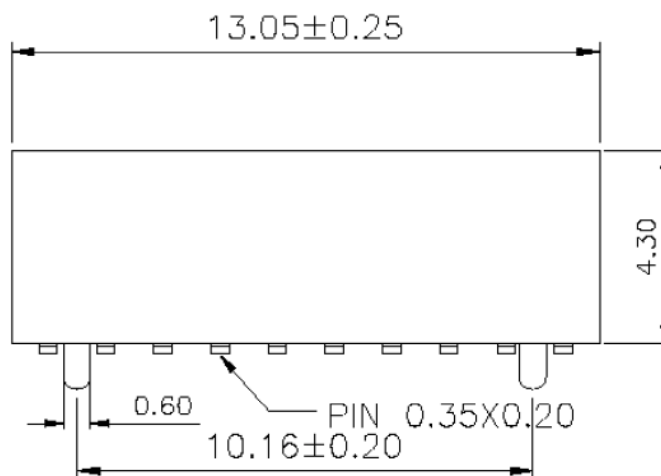

鈺滿榮企業股份有限公司 ACMELUX CO., LTD.

TEL: 886-2-85124595 FAX: 886-2-85124322

0.0±0.30	Scale: 1:1	Title:	PART NO:
0.00±0.20	Unit: mm	Pitch 1.27mm SMT有柱 Type	APP BY: <i>Hung</i>
0.000±0.1		Female Header Connector	CHEK BY: <i>Cheryl</i>
		Material: RoHS	DR BY: <i>Amos</i>
		DWG. NO. C1865454XXX	C050