

**CUSTOMER COPY**


REV.	DESCRIPTION	APP.	DATE
A	NEW DESIGN	Amos	2011-11-29

**ORDER INFORMATION**


188 08 XX XX X

- 3:Plating Gold Flash
- No. of Contact
- 00:A Type H=4.3 W=4.0
- 50:B Type H=4.3 W=4.0
- 90° 單排螃蟹腳 Type


**Type B**

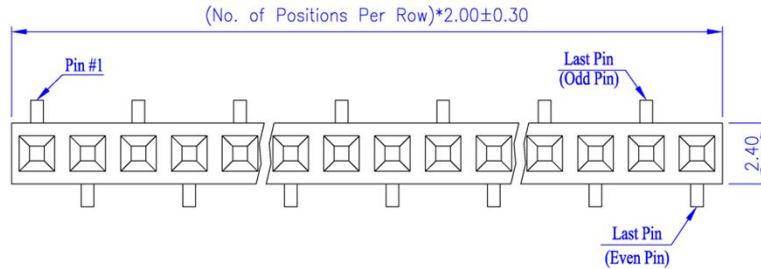


**Type A**

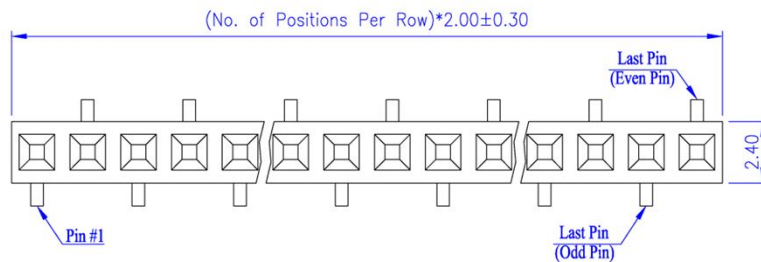



**Type B**

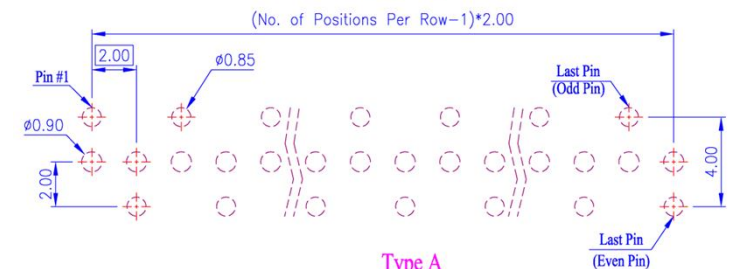

**Type A**

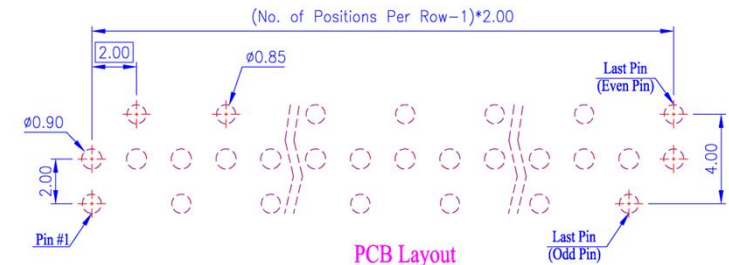

PCB Layout (Top View)

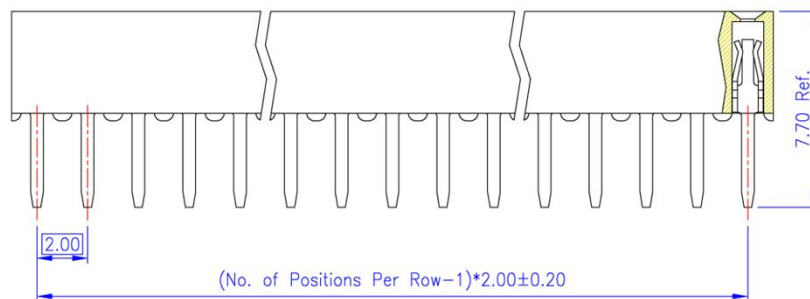

**Material and Finish**

1. Housing: Nylon 9T (UL94V-0), Black.
2. Terminal: Copper Alloy (t=0.20mm), Gold Plating.

**Electrical Characteristics**

1. Current Rating: 3.0 Amp. Max..
2. Dielectric Withstand Voltage: 1000V AC RMS for 60Seconds.
3. Insulation Resistance: 1000M Ohms Min. at 1000V DC.
4. Connect Resistance: 30m Ohms Maximum.

**Mechanical Characteristics**

1. Operating Temperature: -55°C ~ +105°C



鈺滿榮企業股份有限公司 ACMELUX CO., LTD.

TEL:886-2-85124595

FAX:886-2-85124322

0.0±0.30	SCALE: 1:1	TITLE: Pitch 2.0mm Single Row Pass-Through Entry Vertical Type Female Header Conn.	PART NO:
0.00±0.20	UNIT: mm		APP BY: Hung
0.000±0.1			CHK BY: Cheryl
		MATL: RoHS	DR BY: Amos
		DWG. NO. C18808XXXXXX	A015