

CUSTOMER COPY

| REV. | DESCRIPTION | APP. | DATE |
|------|-------------|------|------------|
| A | NEW DESIGN | Amos | 2011-09-21 |

ORDER INFORMATION

188 10 20 XX X

- 3: Plating Gold Flash
- No. of Contact
- H6.35mm Y Type Terminal
- Single Row DIP Type



Specifications

Current Rating: 2Amp
 Insulation Resistance: 1000MΩ Min.
 Dielectric Withstanding: 500VAC
 Contact Resistance: 20mΩ Max.
 Operating Temperature: -40°C to +105°C
 Materials



Contact Material: Brass Gold Flash /Tin
 Insulator Material: Nylon 6T UL 94V-0

Color: Black.

All materials must meet Greenconn requirement for environment protection

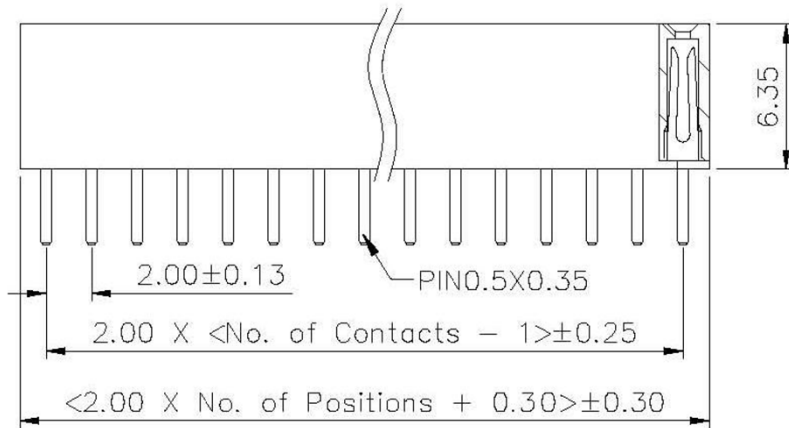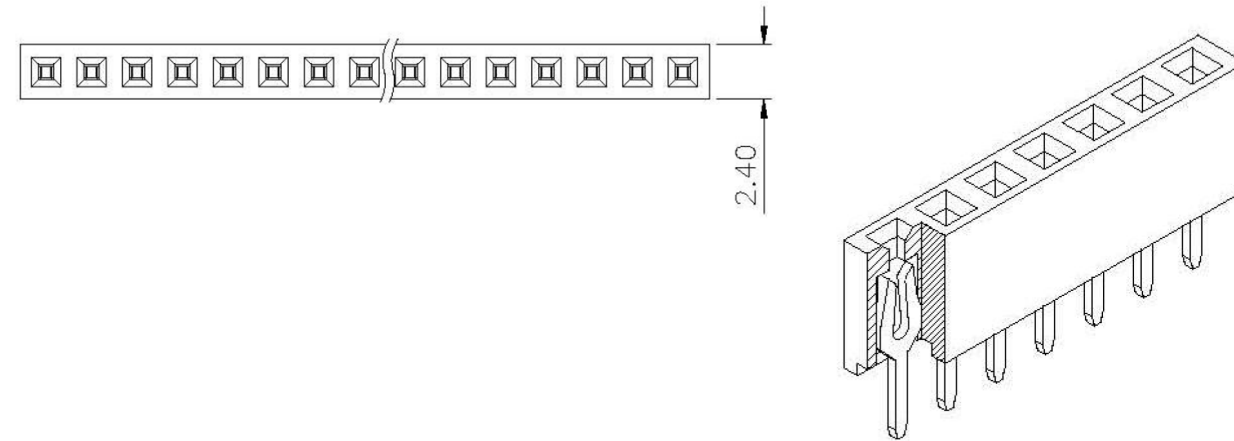

Recommended P.C.B. Layout
 (Tolerance: 0.05mm)

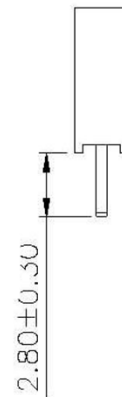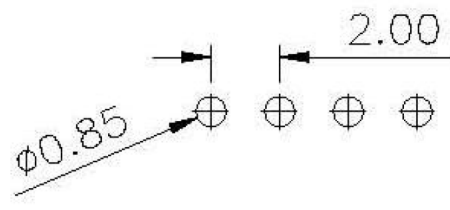

鈺滿榮企業股份有限公司 ACME LUX CO., LTD.

TEL: 886-2-85124595

FAX: 886-2-85124322

| | | | |
|-----------|------------|--|----------------|
| 0.0±0.30 | SCALE: 1:1 | TITLE: | PART NO: |
| 0.00±0.20 | UNIT: mm | Pitch 2.0mm Single Row DIP Type Female Header Connector | APP BY: Hung |
| 0.000±0.1 | | | CHK BY: Cheryl |
| | | MATL: RoHS | DR BY: Amos |
| | | DWG. NO. C1881020XXX | C050 |