


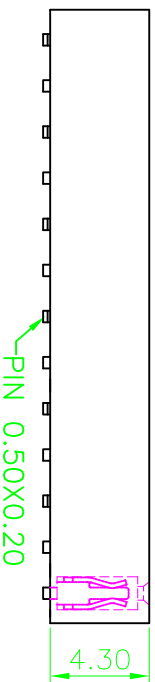


CUSTOMER COPY

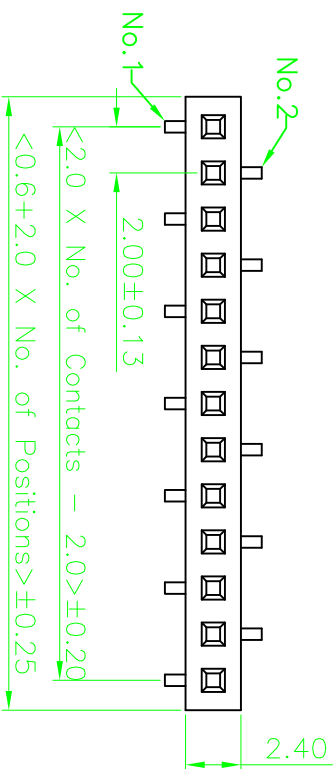


RECOMMENDED P.C.B LAYOUT

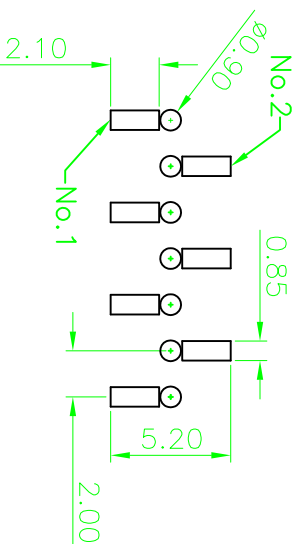

ORDER INFORMATION

188 20 01 XX X

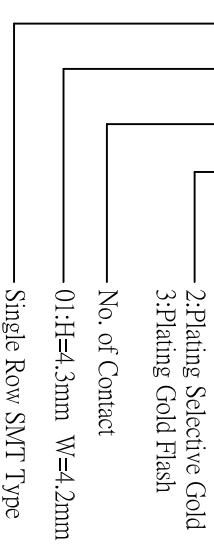

| REV. | DESCRIPTION | APP. | DATE       |
|------|-------------|------|------------|
| A    | NEW DESIGN  | Amos | 2009-11-10 |

Specifications

Current Rating: 2Amp  
 Insulation Resistance: 1000MΩ Min.  
 Dielectric Withstanding: 500V AC/DC  
 Contact Resistance: 20mΩ Max.  
 Operating Temperature: -40°C to +105°C

Materials

Contact Material: Phosphor Bronze  
 Contact Plated: All Gold Flash 10u”  
 Insulation Material: LCP Polyester, UL 94V-0  
 All materials must be GP materials

ROHS



钰满荣企业股份有限公司 ACMEIUX CO., LTD.

TEL:886-2-85124595 FAX:886-2-85124322

|           |            |                                 |                         |
|-----------|------------|---------------------------------|-------------------------|
| 0.0±0.30  | SCALE: 1:1 | TITLE:                          | PART NO.:               |
| 0.00±0.20 | UNIT: mm   | Pitch 2.0mm Single Row SMT Type | APP BY: <i>Stung</i>    |
| 0.000±0.1 |            | Female Header Connector         | CHK BY: <i>Cherryll</i> |
|           |            | MATL: RoHS                      | DR BY: <i>Amos</i>      |
|           |            | DWG. NO. C1882002XXX            | C050                    |