

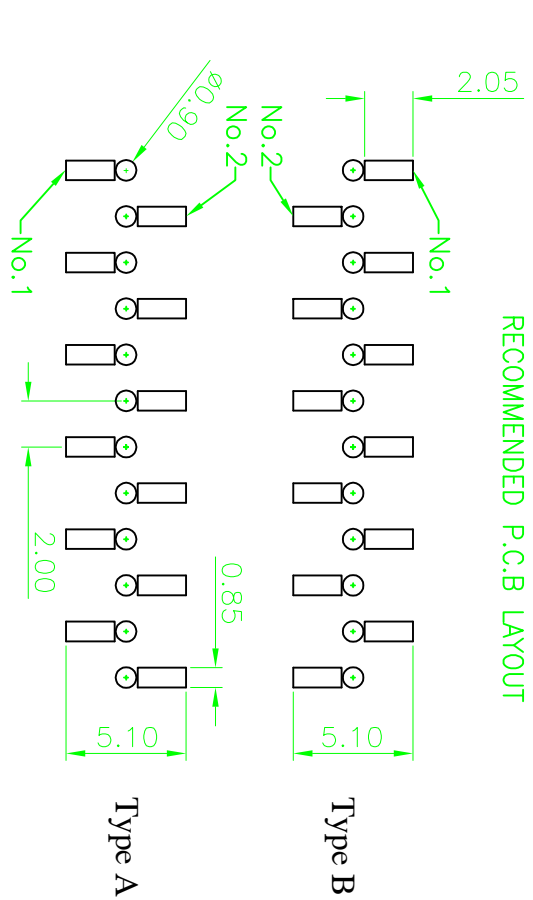


CUSTOMER COPY

No. of Dimensions	
Contact	A B
04	2.00 4.00
06	4.00 6.00
08	6.00 8.00
10	8.00 10.00
12	10.00 12.00
14	12.00 14.00
16	14.00 16.00
18	16.00 18.00
20	18.00 20.00
22	20.00 22.00
24	22.00 24.00
26	24.00 26.00
28	26.00 28.00
30	28.00 30.00
32	30.00 32.00
34	32.00 34.00
36	34.00 36.00
38	36.00 38.00
40	38.00 40.00
42	40.00 42.00
44	42.00 44.00
46	44.00 46.00
48	46.00 48.00
50	48.00 50.00
52	50.00 52.00
54	52.00 54.00
56	54.00 56.00
58	56.00 58.00
60	58.00 60.00
62	60.00 62.00
64	62.00 64.00
66	64.00 66.00
68	66.00 68.00
70	68.00 70.00
72	70.00 72.00
74	72.00 74.00
76	74.00 76.00
78	76.00 78.00
80	78.00 80.00

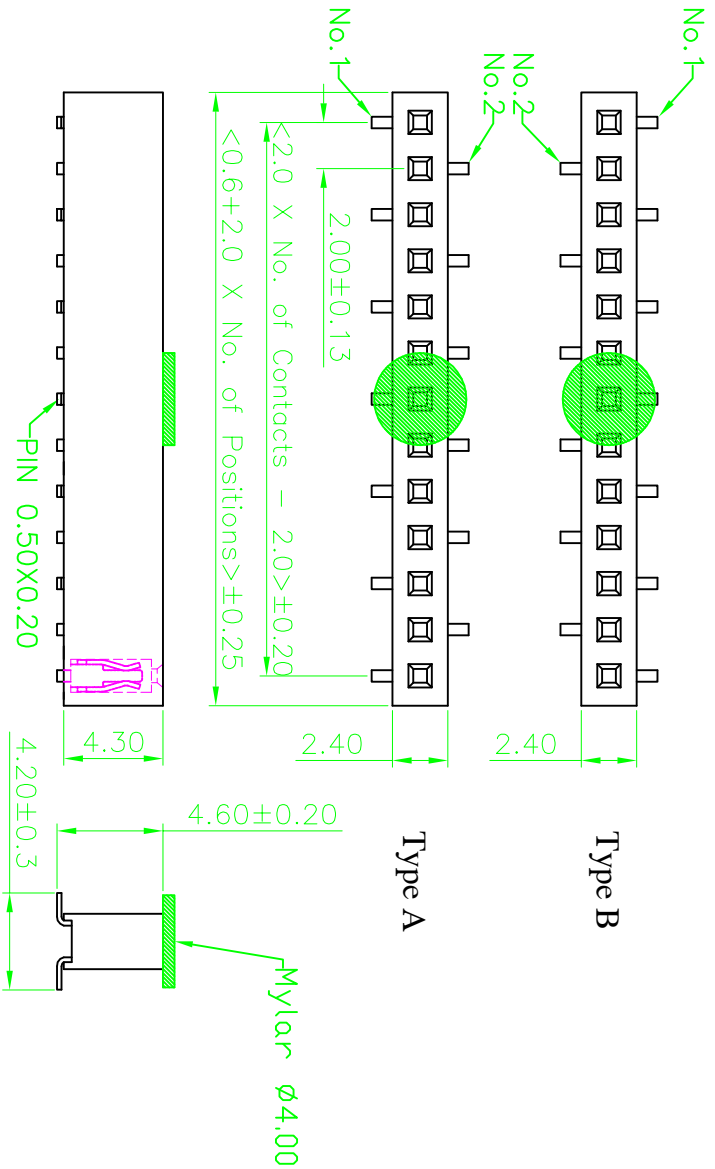

ORDER INFORMATION

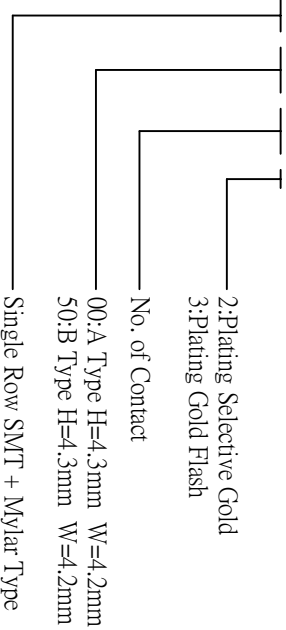

Specifications

Current Rating: 2Amp
 Insulation Resistance: 1000MΩ Min.
 Dielectric Withstanding: 500V AC/DC
 Contact Resistance: 20mΩ Max.
 Operating Temperature: -40°C to +105°C

Materials

Contact Material: Brass
 Contact Plated: All Gold Flash 10u”
 Insulation Material: LCP+30%GF, UL 94V-0
 All materials must be GP materials



钰滿榮企業股份有限公司 ACMELEX CO., LTD.
 TEL:886-2-85124595 FAX:886-2-85124322

0.0±0.35	SCALE: 1:1	TITLE:	PART NO.:
0.00±0.20	UNIT: mm	Pitch 2.0mm Single Row SMT Type Female Header Connector	APP BY: <i>Stung</i>
0.000±0.25		MATL: RoHS	CHK BY: <i>Cheryl</i>
		DWG. NO. C18824XXXXXX	DR BY: <i>Amos</i>

REV.	DESCRIPTION	APP.	DATE
A	NEW DESIGN	Amos	2010-01-14