
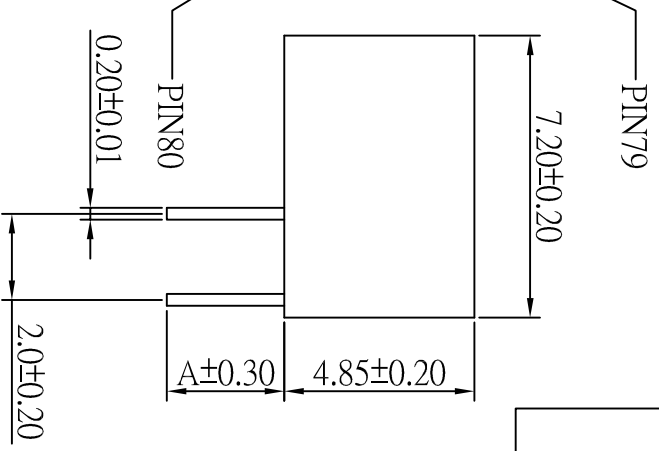


CUSTOMER COPY

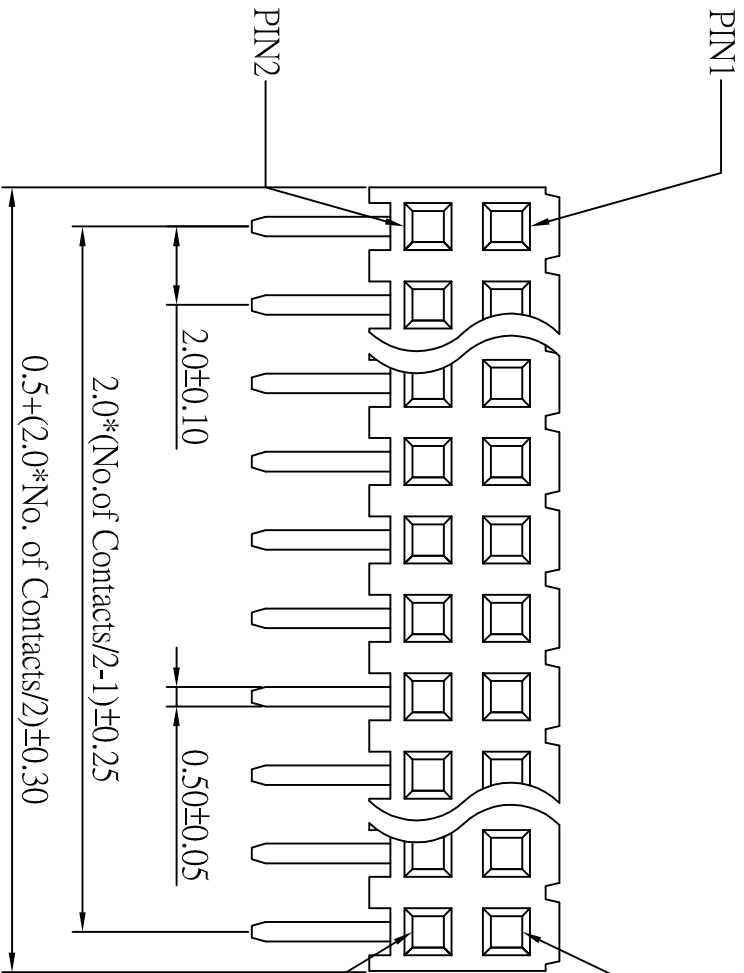

REV	ECN NO.	APP.	DATE
A	NEW DESIGN		

ORDER INFORMATION	188 30 XX XX X
	Plating:
	2: Selective Gold
	3: All Gold
	No. Of Contact (08 ~ 80)
	Pin Chart(ROHS)
	Type

**MATERIAL**


- \* Contact: Phosphor Bronze
- \* Insulator: High Temperature Plastic
- \* Plating: All Gold




**SPECIFICATION**

- \* Current Rating: 1 A
- \* Withstanding Voltage: 500 VAC ( 1 min. )
- \* Insulation Resistance: 1000 Megohms MIN.
- \* Contact Resistance: 30 Milliohms MAX.
- \* Operating Temperature: -55°C to +105°C
- \* Retention Force: 450g MIN.

**Pin Chart**

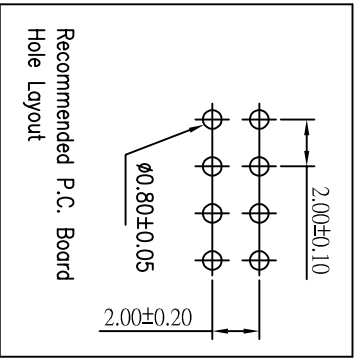No.	A
01	2.6
02	3.0



		
<b>ACMELUX CO., LTD.</b>		
TEL: 886-2-85124595    FAX: 886-2-85124322		
0.0±	SCALE:	TITLE:
0.00±	UNIT: MM	2.00X2.00MM (.79"*.079")
0.000±		Female Header R/A Dual Row
	MATL: ROHS	PART NO: 117010
	DWG. NO. C18830XXXXX	APP BY:
		CHK BY:
		DR BY: JACK LIN