


CUSTOMER COPY

REV.	DESCRIPTION	APP.	DATE
A	NEW DESIGN	Amos	2012-08-05
B	模具變更	Amos	2013-10-29

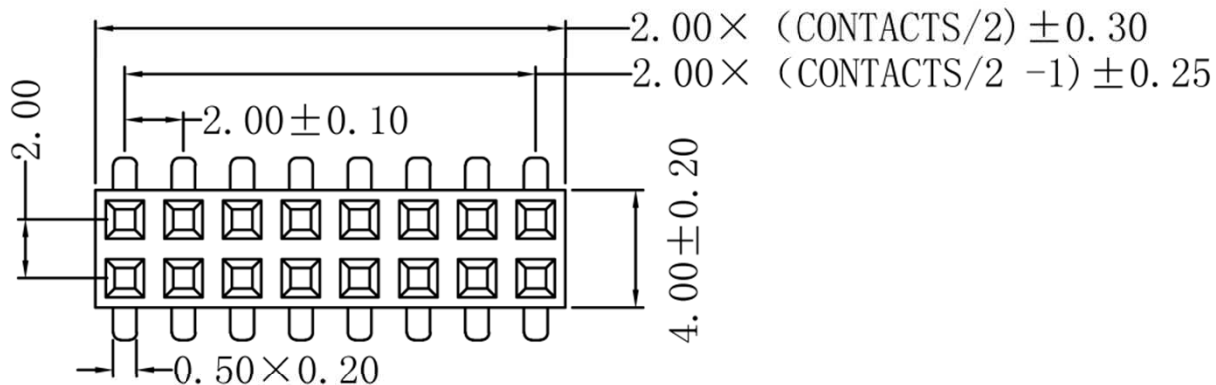


ORDER INFORMATION



188 66 55 XX X

- 2:Plating Selective Gold
- 3:Plating Gold Flash
- No. of Contact
- H=2.2mm , W=6.2mm
- Dual Rows SMT Type

2.00 x (CONTACTS/2 - 1)

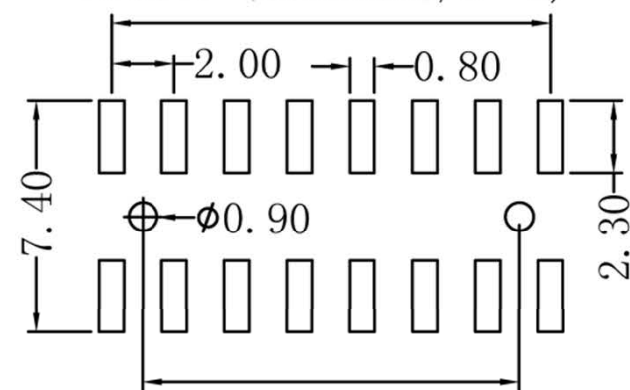

P.C.B . LAYOUT

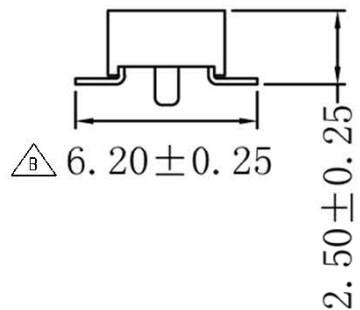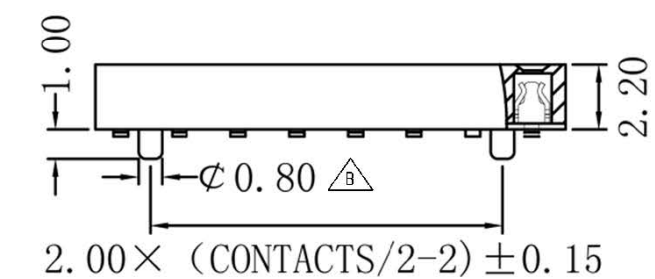

MATERIAL  
 HOUSING : NYLON 6T,UL94V-0  
 CONTACT : PHOSPHOR BRONZE  
 PLATED : GOLD-FLASH  
 COLOR : BLACK

SPECIFICATION  
 CURRENT : 1A  
 OPERATING TEMPERAURE : -40 °C TO +105 °C  
 CONTACT RESISTANCE : 20 MILLIOHMS MAX  
 INSULATION RESISTANCE: 5000 MEGAOHMS MIN  
 WITHSTAND VOLTAGE : 500 V AC MIN

鈺滿榮企業股份有限公司 ACMELUX CO., LTD.  
 TEL:886-2-85124595 FAX:886-2-85124322

0.0±0.38	SCALE: 1:1	TITLE:	PART NO:
0.00±0.25	UNIT: mm	Pitch 2.0mm Dual Rows SMT Type Female Header Connector	APP BY: <i>Hung</i>
0.000±0.15			CHK BY: <i>Cheryl</i>
		MATL: RoHS	DR BY: <i>Amos</i>
		DWG. NO. C1886655XXX	A284