


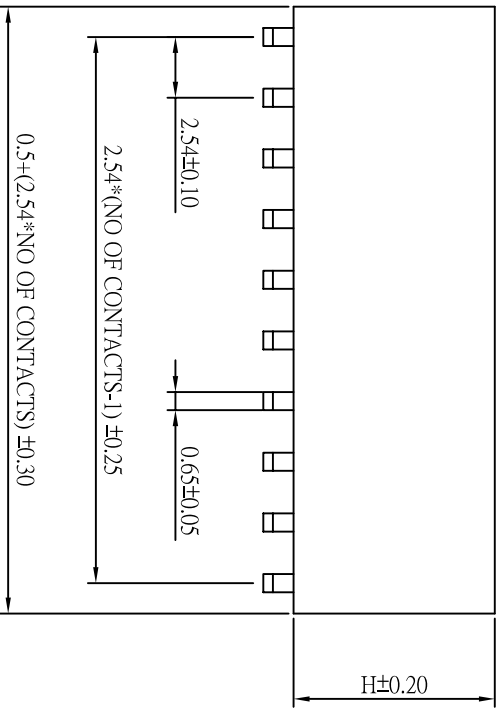


CUSTOMER COPY

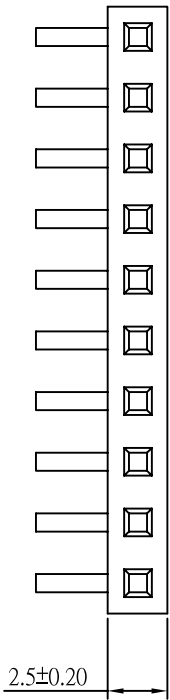

ORDER INFORMATION

189 00 61 XX X

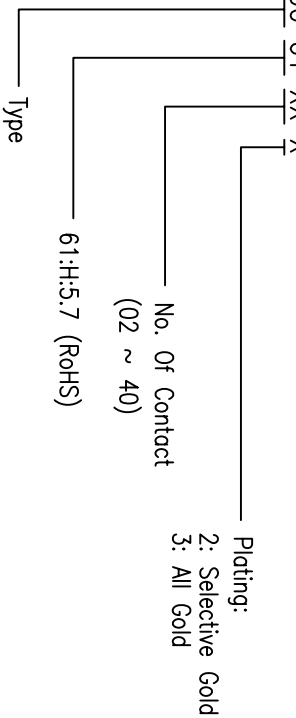

REV	ECN NO.	APP.	DATE
A	NEW DESIGN		

SPECIFICATION


- * Current Rating: 3 A
- * Withstanding Voltage: 500 VAC (1 min.)
- * Insulation Resistance: 1000 Megohms MIN.
- * Contact Resistance: 30 Milliohms MAX.
- * Operating Temperature: -40°C to +85°C
- * Retention Force: 450g MIN.

MATERIAL

- * Contact: Brass
- * Insulator: High temperature plastic
- * Plated: Gold

Pin Chart (RoHS)

No.	A	H
61	3.30	5.7

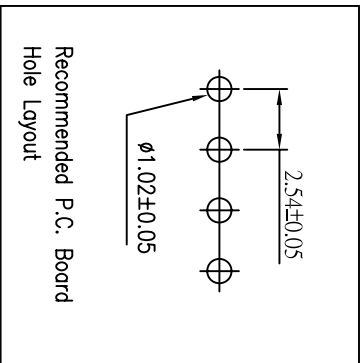

		ACMELUX CO., LTD.	
TEL:886-2-85124595		FAX:886-2-85124322	
0.0±	SCALE:	TITLE:	PART NO: 117110
0.00±	UNIT: mm	2.54MM (.100")Center Female Header R/A Single Row Profile:	APP BY: Hung
0.000±		MATL: RoHS	CHK BY: Cheryl
DWG. NO. C1890061XXX		DR BY: Amos	