

CUSTOMER COPY

ORDER INFORMATION

189 06 50 XX X

3:Plating Gold Flash

No. of Contact

50 : H:7.1 L:3.0 (RoHS)

06 : 180度 Single Row



MATERIALS :

1. HOUSING : NYLON 6T. (UL 94V-0), BLACK.
2. TERMINAL : t=0.25mm COPPER ALLOY, GOLD PLATING.



SPECIFICATION

1. CURRENT RATING : 3 AMP. MAX.
2. DIELECTRIC WITHSTAND VOLTAGE : 1,000V AC R.M.S. FOR 1 MINUTE.
3. INSULATION RESISTANCE : 5,000M OHMS MIN. AT 1,000V DC.
4. OPERATING TEMPERATURE : -55°C TO +105°C.
5. MAX. PROCESSING TEMPERATURE : 230°C FOR 30 TO 60 SECONDS.

E=(No. of Posotion Per Row)x2.54  
 [(No. of Posotion Per Row)x.100]  
 F=(No. of Posotion Per Row-1)x2.54  
 [(No. of Posotion Per Row-1)x.100]

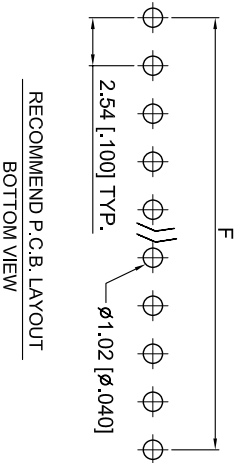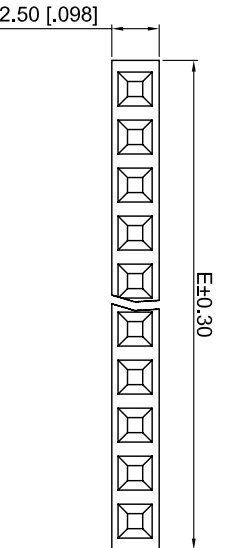


RECOMMEND P.C.B. LAYOUT  
 BOTTOM VIEW

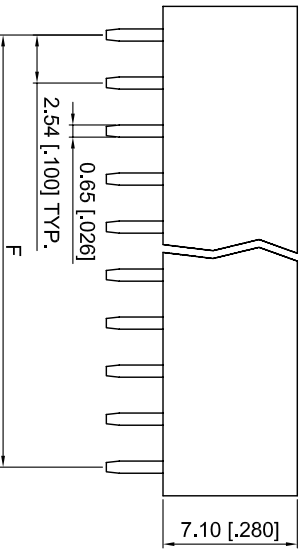

ACMELUX CO., LTD.

TEL:886-85124595 FAX:886-85124322

0.0± 0.30	SCALE: 1:1	TITLE:	PART NO:
0.00± 0.20	UNIT: mm	Pitch 2.54mm Single Row	APP BY: <i>Stung</i>
0.000±0.10		Straight Type Female Header	CHK BY: <i>Sheryl</i>



MATL: RoHS	DR BY: <i>Amos</i>
DWG. NO. C1890650XXXX	A015