


CUSTOMER COPY

REV.	DESCRIPTION	APP.	DATE
A	NEW DESIGN	Amos	2011-05-18



(No. of Positions Per Row)*2.54+0.40±0.30

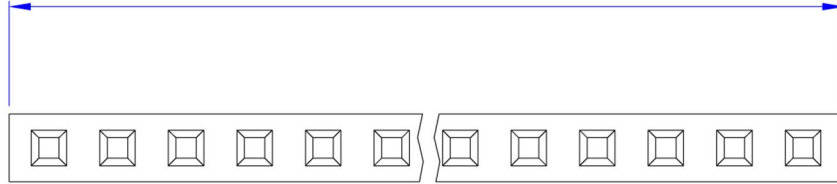

ORDER INFORMATION

189 06 60 XX X

- 3:Plating Gold Flash
- No. of Contact
- 下針長 2.8mm
- 180° Type

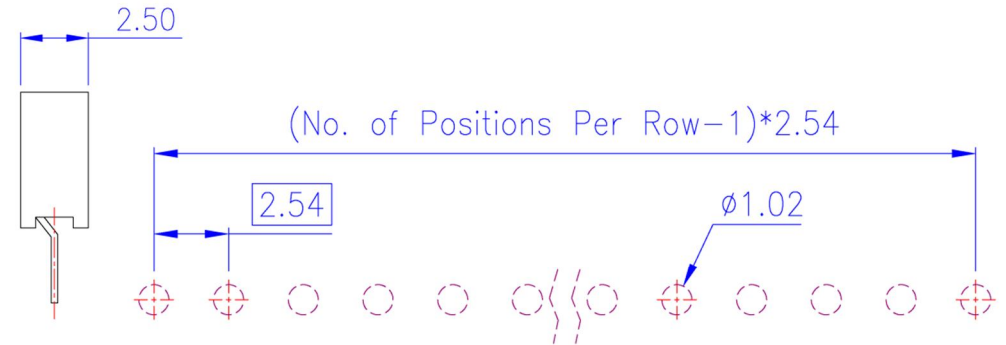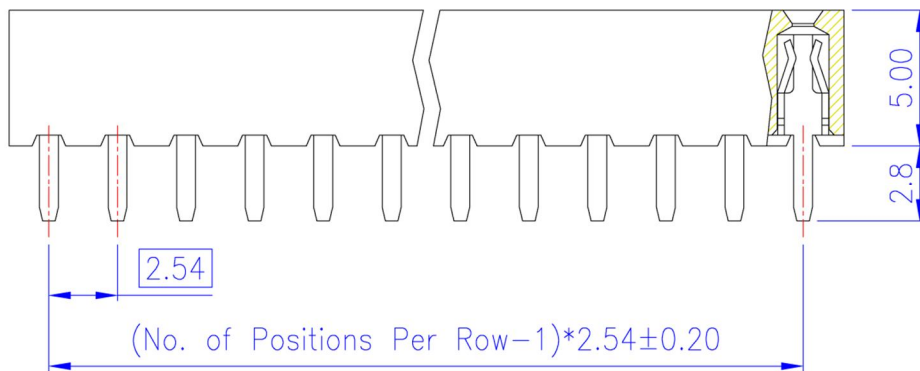




PCB Layout
(Top View)



Material and Finish
 1. Housing: Nylon 6T (UL94V-0), Black.
 2. Terminal: Copper Alloy (t=0.25mm), Gold Plating.

Electrical Characteristics
 1. Current Rating: 3.0 Amp. Max..
 2. Dielectric Withstand Voltage:
 1000V AC RMS for 60Seconds.
 3. Insulation Resistance:
 1000M Ohms Min. at 1000V DC.
 4. Contact Resistance: 30m Ohms Max.

Mechanical Characteristics
 1. Operating Temperature: -55°C ~ +105°C

 鈺滿榮企業股份有限公司 ACMELUX CO., LTD. TEL:886-2-85124595 FAX:886-2-85124322			
0.0±0.30	SCALE: 1:1	TITLE:	PART NO:
0.00±0.20	UNIT: mm	Pitch 2.54mm Single Row Vertical Type Female Header Connector	APP BY: Hung
0.000±0.1		MATL: RoHS	CHK BY: Cheryl
 		DWG. NO. C1890660XXX	DR BY: Amos

A015