





CUSTOMER COPY

REV.	DESCRIPTION	APP.	DATE
A	NEW DESIGN	Amos	2012-08-03

ORDER INFORMATION

189 06 XX XX X

- 3: Plating Gold Flash
- No. of Contact
- 04: H=8.5mm L=9.9mm
- 180° Single Row Type

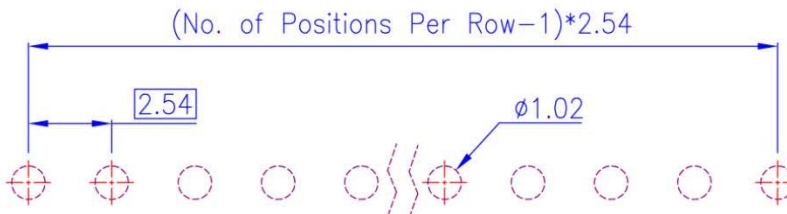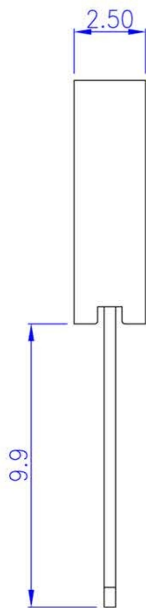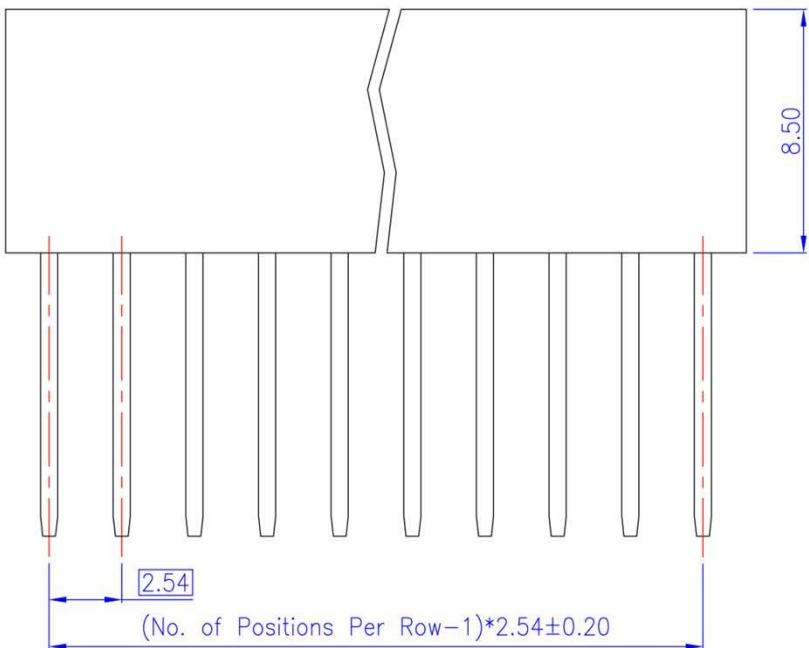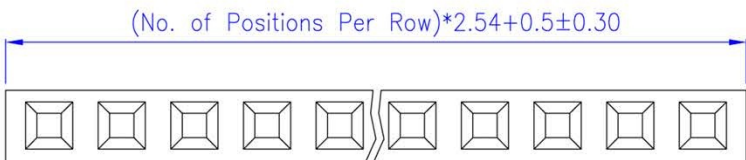

PCB Layout
(Top View)



Material and Finish

1. Housing: Nylon 6T (UL94V-0), Black
2. Terminal: Copper Alloy (t=0.60mm), Gold Plating.

Electrical Characteristics

1. Current Rating: 3.0 Amp. Max..
2. Dielectric Withstand Voltage: 1000V AC RMS for 60Seconds.
3. Insulation Resistance: 1000M Ohms Min. at 1000V DC.
4. Contact Resistance: 30m Ohms Max.

Mechanical Characteristics

1. Operating Temperature: -55°C ~ +105°C



鈺滿榮企業股份有限公司 ACMELUX CO., LTD.

TEL: 886-2-85124595

FAX: 886-2-85124322

0.0±0.30	SCALE: 1:1	TITLE: Pitch 2.54mm Single Row Vertical Type H=8.5mm Female Header Connector	PART NO:
0.00±0.20	UNIT: mm		APP BY: <i>Hung</i>
0.000±0.1			CHK BY: <i>Cheryl</i>
		MATL: RoHS	DR BY: <i>Amos</i>
		DWG. NO. C18906XXXXX	A308