

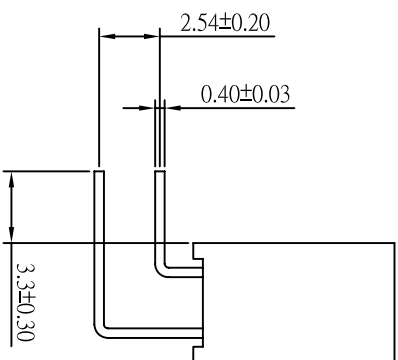
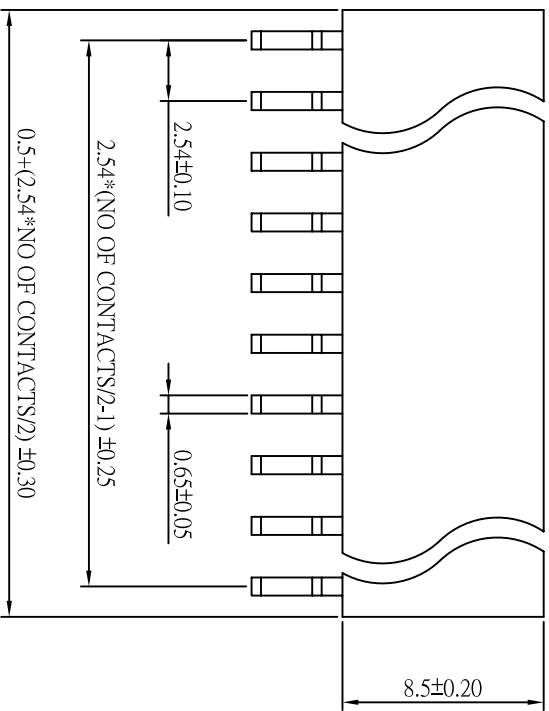


CUSTOMER COPY

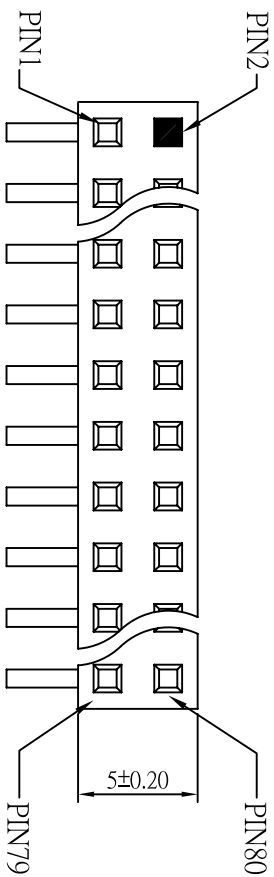

Nc Pin Chart

No.	Nc Pin	No.	Nc Pin
50	22	54	9
51	11	55	3
52	2	56	3 (Pin Over)
53	13		

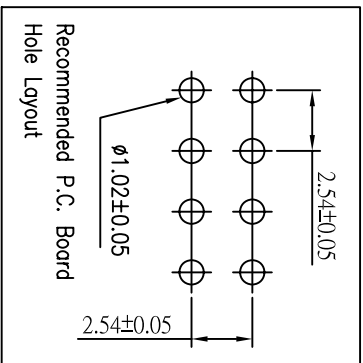

ORDER INFORMATION
 189 30 XX XX X
 Type _____
 Nc Pin Chart _____
 No. Of Contact (04 ~ 80) _____
 Plating
 2: selective Gold
 3: All Gold

REV	ECN NO.	APP.	DATE
A	NEW DESIGN		

SPECIFICATION

MATERIAL

- * Current Rating: 3 A
- * Withstanding Voltage: 500 VAC (1 min.)
- * Insulation Resistance: 5000 Megohms MIN.
- * Contact Resistance: 20 Milliohms MAX.
- * Operating Temperature: -40°C to +105°C
- * Contact: Phosphor Bronze
- * Insulator: High Temperature Plastic
- * Plated: Gold



ACMELUX CO., LTD.

TEL:886-2-85124595 FAX:886-2-85124322

0.0±	SCALE:	TITLE:	PART NO:
0.00±	UNIT: mm	2.54X2.54MM (.100"*.100")	APP BY: Hung
0.000±		Female Header R/A Dual Row Profile:8.5mm 穿孔	CHK BY: Cheryl
		MATL: RoHS	DR BY: Amos
		DWG. NO. C18930XXXXXX	