

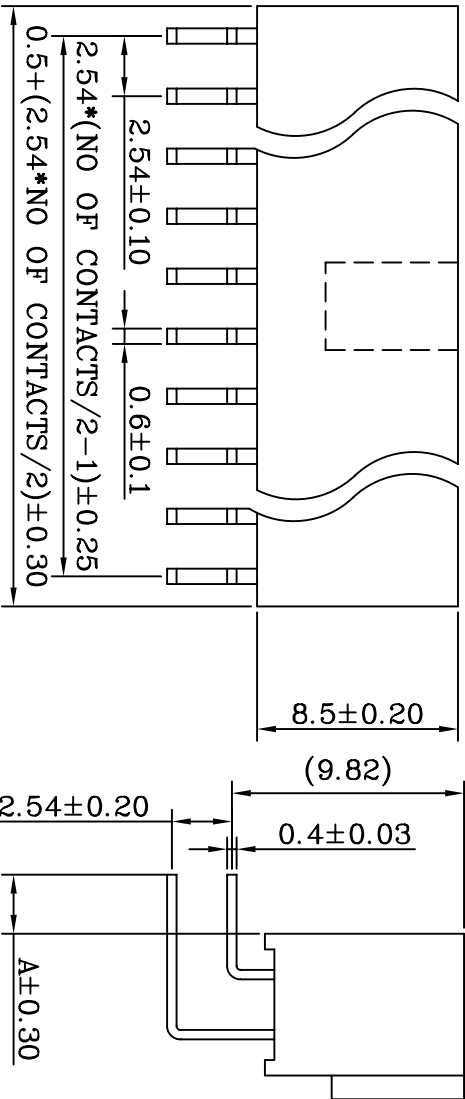


CUSTOMER COPY

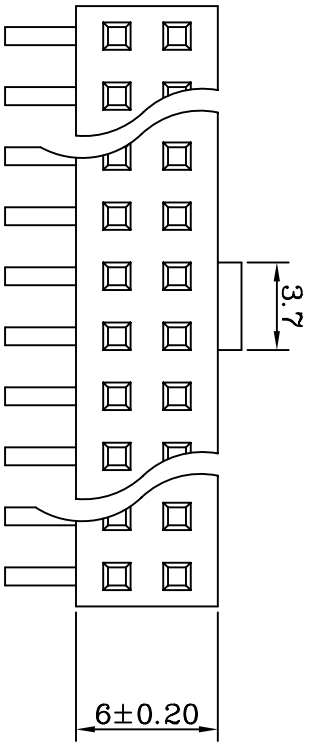


Pin Chart

No.	A
50	3.3



ORDER INFORMATION

189 32 5X XX X

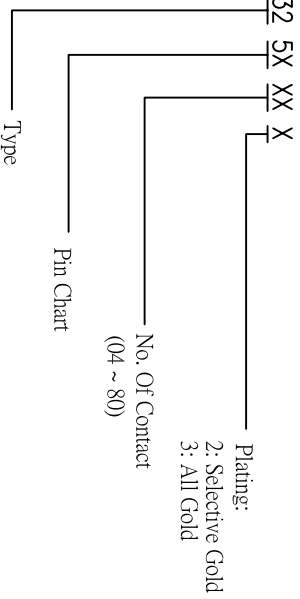

REV.	DESCRIPTION	APP.	DATE
A	NEW DESIGN		

SPECIFICATION

MATERIAL

- \* Current Rating: 3 A
- \* Withstanding Voltage: 500 VAC (1 min.)
- \* Insulation Resistance: 1000 Megohms MIN.
- \* Contact Resistance: 30 Milliohms MAX.
- \* Operating Temperature: -40°C to +85°C
- \* Retention Force: 450g MIN.
- \* Contact: Brass
- \* Insulator: High temperature plastic
- \* Plated: Gold



ACMELUX CO., LTD.

TEL:886-85124595

FAX:886-85124322

0.0±	SCALE: 1:1	TITLE: 2.54X2.54MM (.100"*.100")	PART NO: 117900
0.00±	UNIT: mm	Female Header R/A Dual Row	APP BY: Hung
0.000±		Profile:8.5mm	CHK BY: Cheryl
		MATL: RoHS	DR BY: Amos
		DWG. NO. C189325XXXX	