
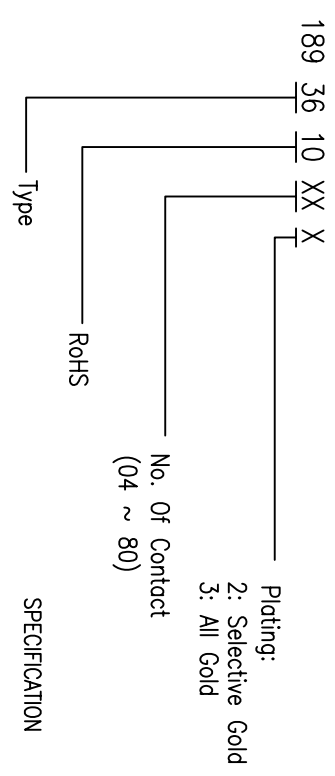
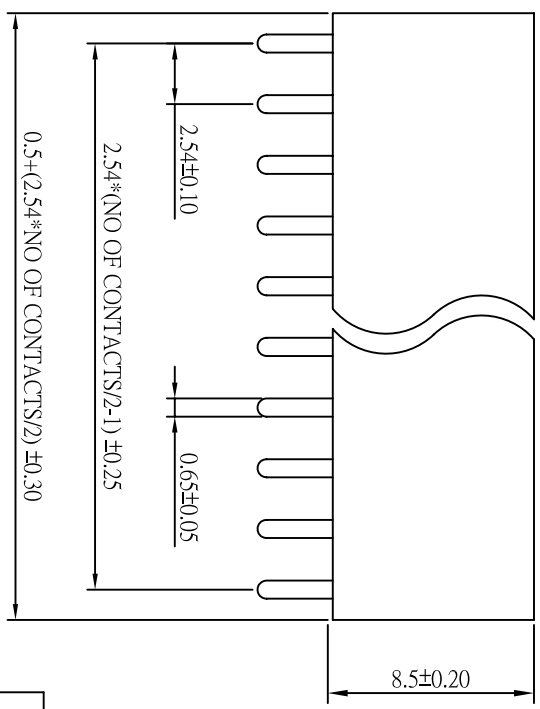


CUSTOMER COPY

ORDER INFORMATION

REV	ECN NO.	APP.	DATE
A	NEW DESIGN		


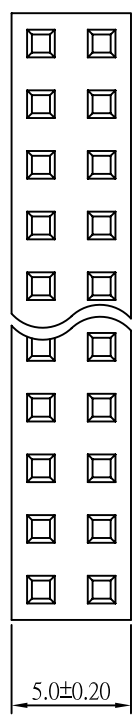


SPECIFICATION

- * Current Rating: 3 A
- * Withstanding Voltage: 500 VAC (1 min.)
- * Insulation Resistance: 1000 Megohms MIN.
- * Contact Resistance: 30 Milliohms MAX.
- * Operating Temperature: -40°C to +85°C
- * Retention Force: 450g MIN.

MATERIAL

- * Contact: Brass
- * Insulator: High temperature plastic
- * Plated: Gold

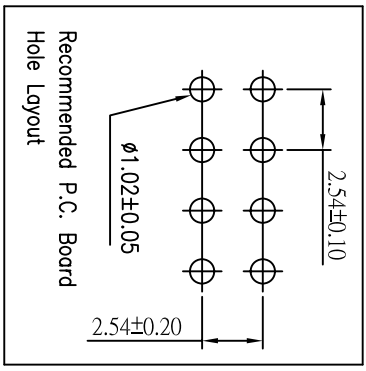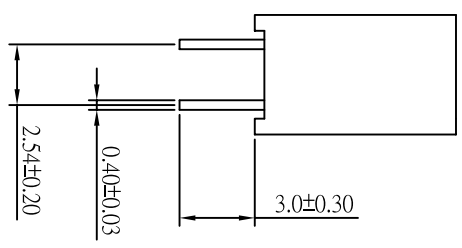

ACMELUX CO., LTD.

TEL:886-2-85124595 FAX:886-2-85124322

0.0±	SCALE:	TITLE:	PART NO:
0.00±	UNIT:	2.54X2.54MM (.100"*.100")	APP BY: Hung
0.000±	mm	Female Header Dual Row profile: 8.3mm	CHK BY: Cheryl
		MATL: RoHS	DR BY: Amos
		DWG. NO. C1893610XXX	