

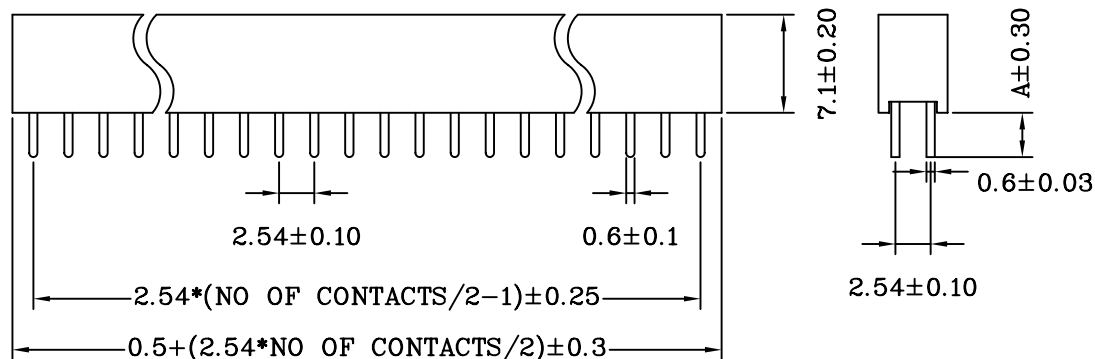


CUSTOMER COPY



ORDER INFORMATION

189 36 3X XX X

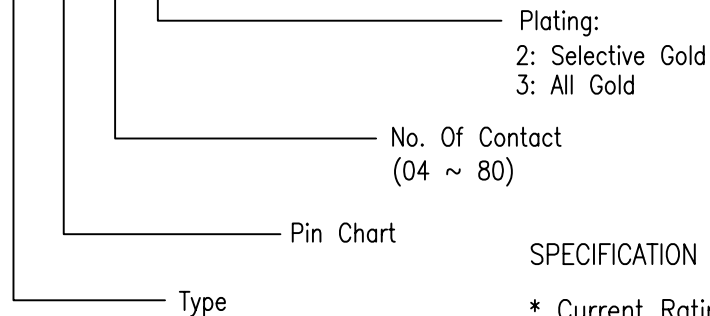

SPECIFICATION


- \* Current Rating:  
3 A
- \* Withstanding Voltage:  
500 VAC ( 1 min. )
- \* Insulation Resistance:  
1000 Megohms MIN.
- \* Contact Resistance:  
30 Milliohms MAX.
- \* Operating Temperature:  
-40°C to +85°C
- \* Retention Force:  
450g MIN.



MATERIAL

- \* Contact: Brass
- \* Insulator: High temperature plastic
- \* Plated: Gold

Pin Chart

No.	A
30	3.0

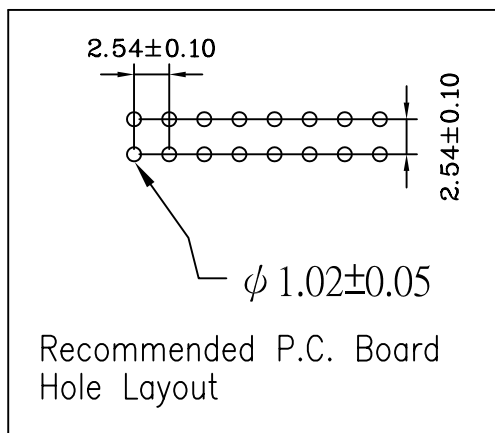

		<b>ACMELUX CO., LTD.</b> TEL:886-2-85124595 FAX:886-2-85124322	
		0.0± 0.00± 0.000±	SCALE: UNIT: MM
		MATL: RoHS DWG. NO. C189363XXXX	