


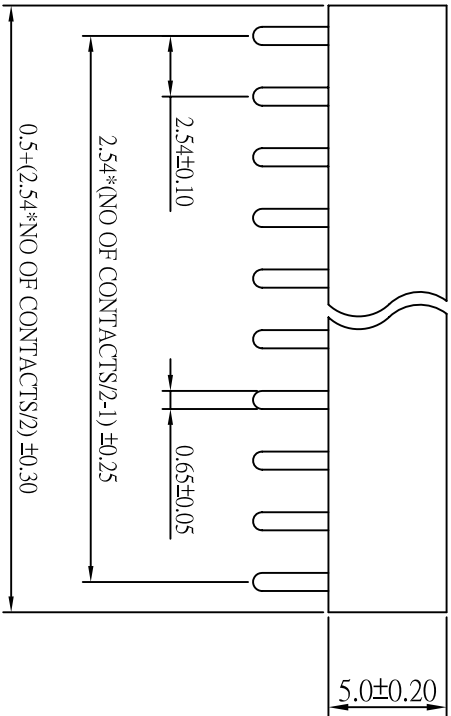


CUSTOMER COPY

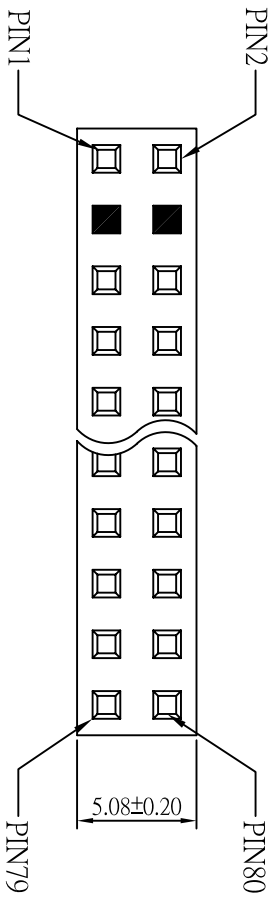

ORDER INFORMATION

189 38 7X XX X

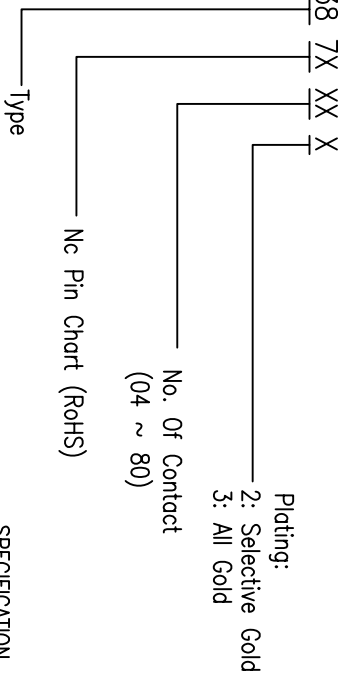

REV	ECN NO.	APP.	DATE
A	NEW DESIGN		

SPECIFICATION


- * Current Rating: 3 A
- * Withstanding Voltage: 500 VAC (1 min.)
- * Insulation Resistance: 1000 Megohms MIN.
- * Contact Resistance: 30 Milliohms MAX.
- * Operating Temperature: -40°C to +85°C
- * Retention Force: 450g MIN.

MATERIAL

- * Contact: Brass
- * Insulator: High temperature plastic
- * Plated: Gold

Nc Pin Chart (RoHS)

No.	Nc Pin
70	3,4



ACMELUX CO., LTD.

TEL:886-2-85124595 FAX:886-2-85124322

0.0±	SCALE:	TITLE:	PART NO:
0.00±	UNIT:	2.54X2.54MM (.100"*.100")	118700
0.000±	mm	Female Header Dual Row profile: 5.0mm	APP BY: Hung
		MATL: RoHS	CHK BY: Cheryl
		DWG. NO. C189387XXXX	DR BY: Amos