
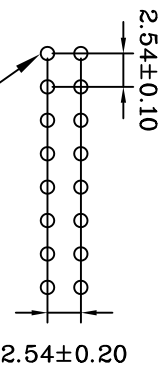
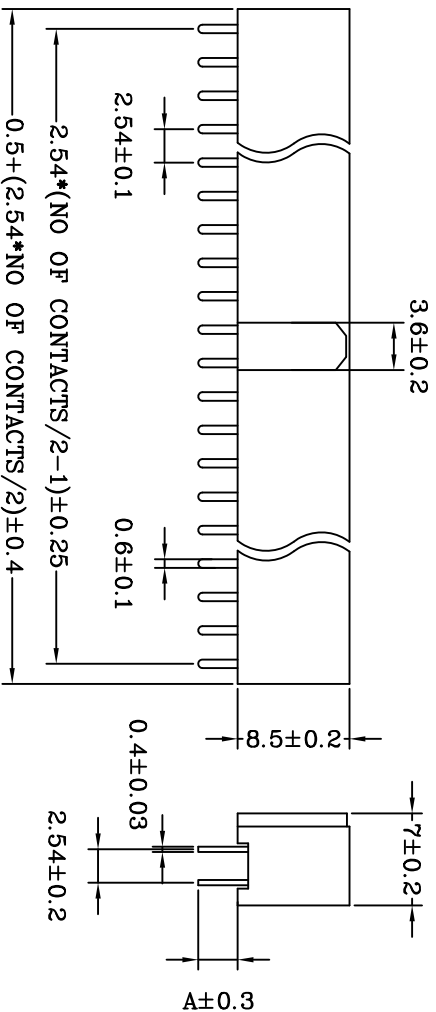


CUSTOMER COPY

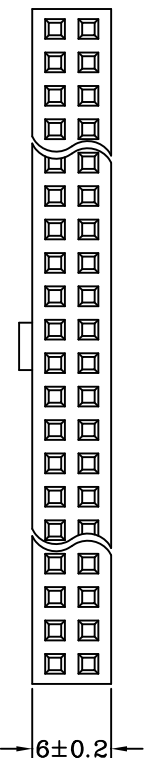


Recommended P.C. Board Hole Layout

| No. | A |
|-----|-------|
| 10 | 3.00 |
| 11 | 12.20 |

| REV. | DESCRIPTION | APP. | DATE |
|------|-------------|------|------|
| A | NEW DESIGN | | |

ORDER INFORMATION

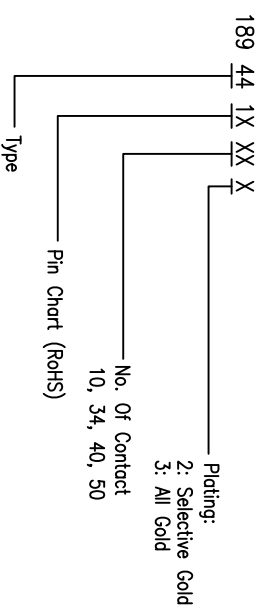

SPECIFICATION

MATERIAL

- * Current Rating: 3 A
- * Withstanding Voltage: 500 VAC (1 min.)
- * Insulation Resistance: 1000 Megohms MIN.
- * Contact Resistance: 30 Milliohms MAX.
- * Operating Temperature: -40°C to +85°C
- * Retention Force: 450g MIN.
- * Contact: Brass
- * Insulator: High temperature plastic
- * Plated: Gold



钰满棠企业股份有限公司 ACMELEX CO., LTD.

TEL:886-2-85124595

FAX:886-2-85124322

| | | | |
|-----------|------------|-------------------------------|-----------------|
| 0.0±0.30 | SCALE: 1:1 | TITLE: Pitch 2.54X2.54mm Dual | PART NO: 117600 |
| 0.00±0.20 | UNIT: mm | Row profile: 8.5mm | APP BY: Hung |
| 0.000±0.1 | | Female Header Connector | CHK BY: Cheryl |
| | | MATL: RoHS | DR BY: Amos |
| | | DWG. NO. C189441XXXX | |