

CUSTOMER COPY

REV.	DESCRIPTION	APP.	DATE
A	NEW DESIGN		

***Oder Information**

1645 XXX 07 X

2: Selective Gold
 4: Selective Gold (Gold 15u")
 7: Selective Gold (Gold 30u")

No. Of Contact

Type:

001:180° DIP 有鐵殼

NOTES:

***Material**

Housing: Nylon46,UL 94-0 Rated;
 Contact: Brass;
 Plating: Gold plating over Nickel on contact area; Tin plating on Solder Tail.
 Shell: Brass
 Plating: Over Nickel

***Mechanical**





Insertion Force: 4080g max;
 Withdrawal Force: 1020g min;
 Durability: 500 cycles.

***Electrical Specification**



Operation Voltage:100 VAC MAX.
 Current Rating: 1.5 Ampere per contact
 Contact Resistance: 30m OHM MAX.
 Insulation Resistance: 1000M OHM MIN
 Dielectric Withstanding Voltage:500VAC.

***Environmental**


Operating Temperature : -55°c to +125°c.

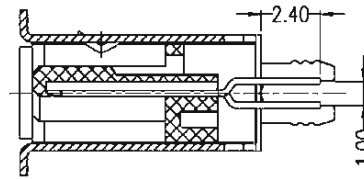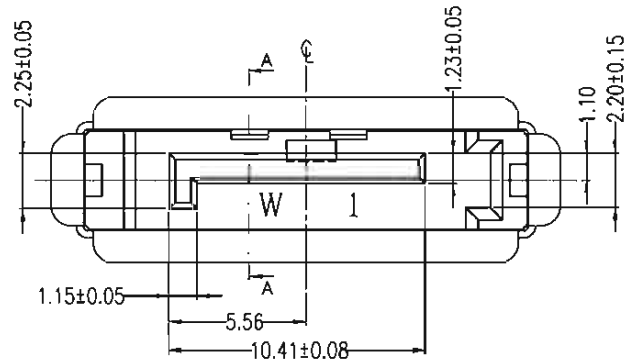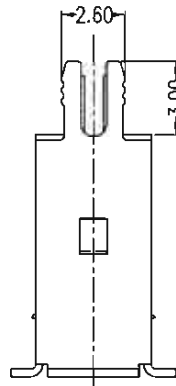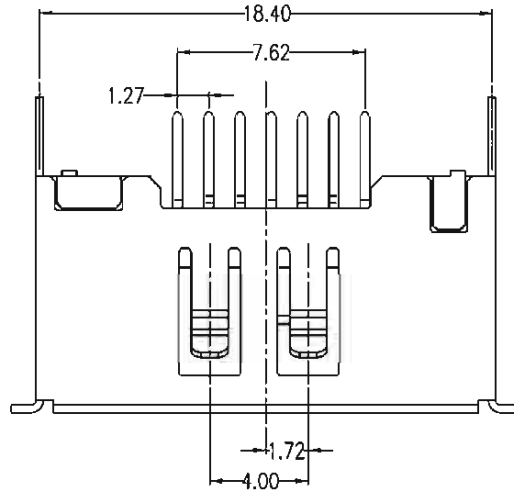

SECT A-A

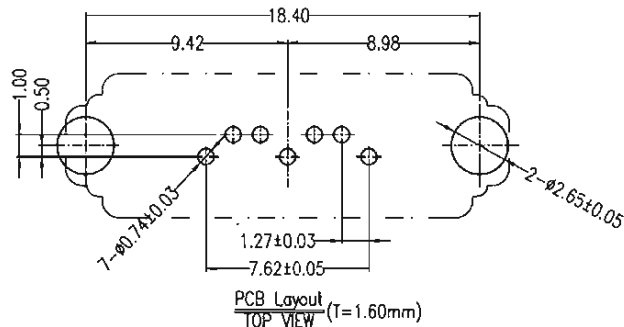

Product 3D

 鈺滿榮企業股份有限公司 ACMELUX CO., LTD. TEL:886-2-85124595 FAX:886-2-85124322		TITLE: SATA 7P Shell		PART NO:
		Vertical DIP A Type		APP BY: Hung
0.0±0.30	SCALE:	UNIT: mm	MATL: ROHS	CHK BY: Cheryl
0.00±0.20			DWG. NO. C1645XXX07X	DR BY: Ader A042
0.000±0.1				