

CUSTOMER COPY

1

2

3

4


5

6

REV.	DESCRIPTION	APP.	DATE
A	NEW DESIGN	Amos	2010-03-05






ORDER INFORMATION

1196 10 X XX X

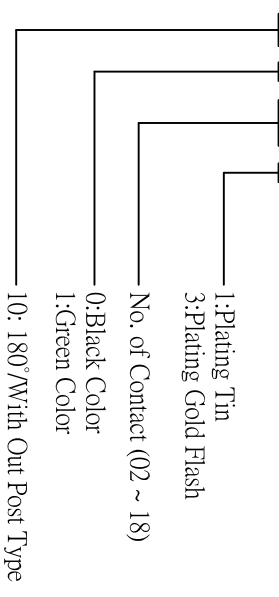

2 pin


3 ~ 18 pin

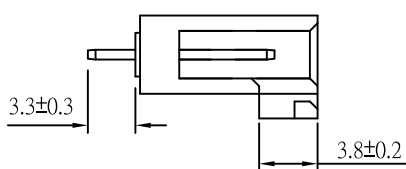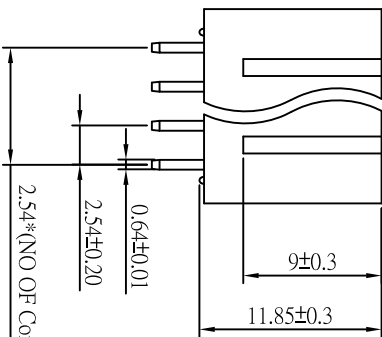

SPECIFICATION

MATERIAL

- * Current Rating: 3 A
- * Withstanding Voltage: 500 VAC (1 min.)
- * Insulation Resistance: 1000 Megohms MIN.
- * Contact Resistance: 20 Milliohms MAX.
- * Operating Temperature: -40°C to +85°C
- * Retention Force: 1 kg MIN.
- * Contact: Brass , 0.64mm Square post
- * Insulator: PBT & 30% G.F.
- * Plating: Gold



Recommended P.C. Board Hole Layout



钰满棠企业股份有限公司 ACMELUX CO., LTD.
TEL:886-2-85124595 FAX:886-2-85124322

0.0±0.30	SCALE: 1:1	TITLE:	PART NO.:
0.00±0.20	UNIT: mm	Pitch 2.54mm 180° 小间距 Type	APP BY: Hung
0.000±0.1		Water Connector	CHK BY: Cheryl
		MATL: RoHS	DR BY: Amos
		DWG. NO. C119610XXXX	

1

2

3

4

5

6