

CUSTOMER COPY

| REV. | DESCRIPTION | APP. | DATE |
|------|-------------|------|------|
| A | NEW DESIGN | | |

*Order Information

1200 18 X XX X





1: Tin
 No. Of Contact
 0: Reel
 1: Tube
 90度SMT 雙排

MATERIAL

Housing: HTN UL 94V-0
 Contact: Phosphor bronze tin plated

SPECIFICATION

Current rating: 1A AC, DC
 Voltage rating: 250V AC, DC
 Temperature range: -25°C ~ +85°C
 Contact resistance: 20mΩ Max.
 Insulation resistance: 1000MΩ Min.
 Withstanding voltage: 1000V AC/minute

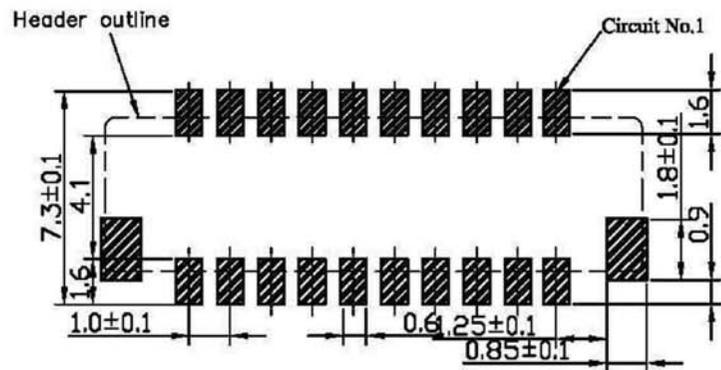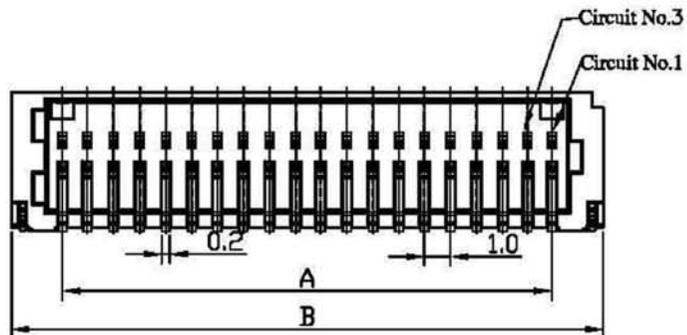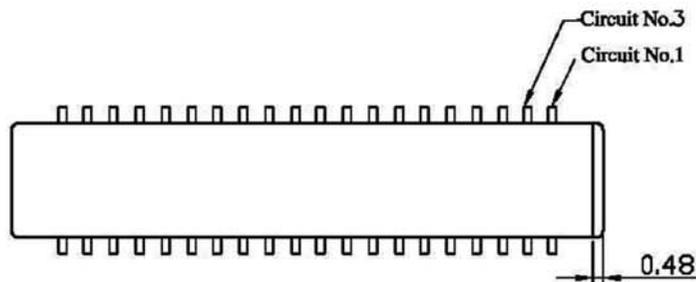

RECOMMENDED P.C. BOARD PATTERN DIM.

| Part No. | Dimension mm (in.) | |
|----------|--------------------|------|
| | A | B |
| 2*10 | 9.0 | 13.1 |
| 2*15 | 14.0 | 18.1 |
| 2*20 | 19.0 | 23.1 |
| 2*25 | 24.0 | 28.1 |



鈺滿榮企業股份有限公司 ACME LUX CO., LTD.

TEL: 886-2-85124595

FAX: 886-2-85124322

| | | | |
|-----------|----------|-----------------------------|------------------|
| 0.0±0.30 | SCALE: | TITLE: | PART NO: |
| 0.00±0.20 | UNIT: mm | JST1.0mm Wafer SMT 90° 雙排系列 | APP BY: Hung |
| 0.000±0.1 | | MATL: ROHS | CHK BY: Cheryl |
| | | DWG. NO. C120018XXXX | DR BY: Ader A303 |

