



CUSTOMER COPY

REV.	DESCRIPTION	APP.	DATE
A	NEW DESIGN	Amos	2012-04-02





ORDER INFORMATION

1201 0 5 3 XX 1

- 1: Plating Tin
- No. of Contact
- REEL Packing
- 180° 全耳(不加CAP)
- SMT Type

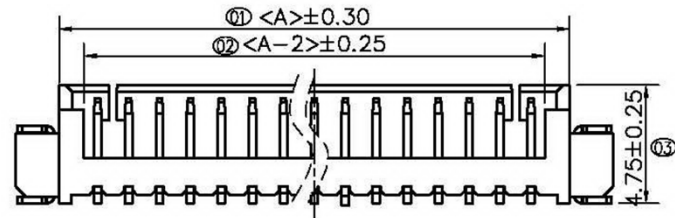


(2~3pin 的只有一个在中间)
(如上图示)

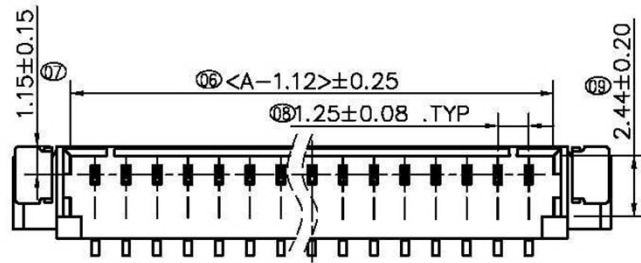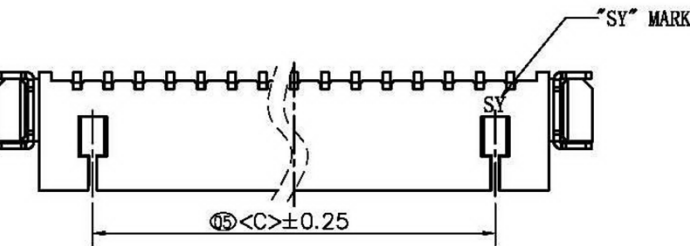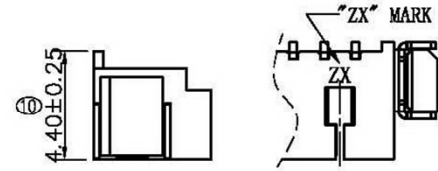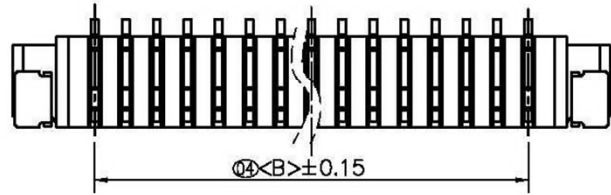

NO.	Dimensions		
	A	B	C
02	4.25	1.25	
03	5.50	2.50	
04	6.75	3.75	2.50
05	8.00	5.00	3.75
06	9.25	6.25	5.00
07	10.50	7.50	6.25
08	11.75	8.75	7.50
09	13.00	10.00	8.75
10	14.25	11.25	10.00
11	15.50	12.50	11.25
12	16.75	13.75	12.50
13	18.00	15.00	13.75
14	19.25	16.25	15.00
15	20.50	17.50	16.25

Recommended P.C.B Layout (Top Side)
P.C.B Thickness = 1.20mm (Tolerance = ±0.05)

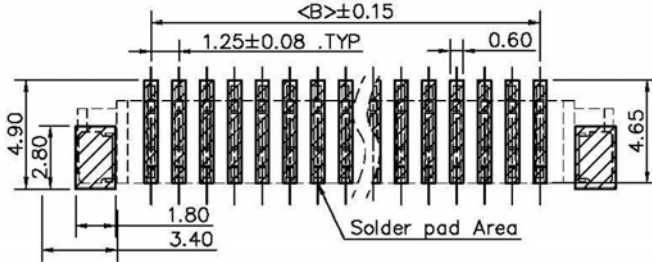

NOTES:
CURRENT RATING: 1A AC/DC.
VOLTAGE RATING: 125V AC/DC.
TEMPERATURE RANGE: -25°C~+85°C.
CONTACT RESISTANCE: 20mΩ MAX.
INSULATION RESISTANCE: 500MΩ MIN.
WITHSTANDING VOLTAGE: 500V AC/MINUTE.

Contact: Brass
Housing: PA46 UL94V-0

鈺滿榮企業股份有限公司 ACME LUX CO., LTD.
TEL: 886-2-85124595 FAX: 886-2-85124322

0.0±0.30	SCALE: 1:1	TITLE: Pitch 1.25mm 180° SMT Type Wafer Connector	PART NO:
0.00±0.20	UNIT: mm	MATERIAL: RoHS	APP BY: <i>Hung</i>
0.000±0.1			CHK BY: <i>Cheryl</i>
DWG. NO. C1201053XX1		DR BY: <i>Amos</i>	

A303

